



# NATHALIUM

Elevating Spaces with Italian Precision

CLOSETS



ARONA

# TABLE OF CONTENT

- 01** Introduction ..... 03
- 02** System Installation
  - Prepare And Install Rails ..... 05
  - Choose Rail Position ..... 06
- 03** Sliding Door Options
  - 2 Door Configuration ..... 07
  - 3 Door Configuration ..... 08
  - 4 Door Configuration ..... 09
- 04** Shutter Details ..... 10
- 05** Glass and color Options ..... 11
- 06** Glass and color Options ..... 13-14

# INTRODUCTION

The Arona Closet System is designed with functionality, durability, and clean design in mind. This catalogue provides detailed information on the installation process, including rail fixing and positioning, shutter profiles with dimensions, and available configurations for 2-door, 3-door, and 4-door systems. The catalogue also covers the soft-close mechanism for smooth and reliable operation.











# SYSTEM INSTALLATION

## Prepare and Install Rails

1. Insert the adapters into the **upper rail** to prepare for door installation.

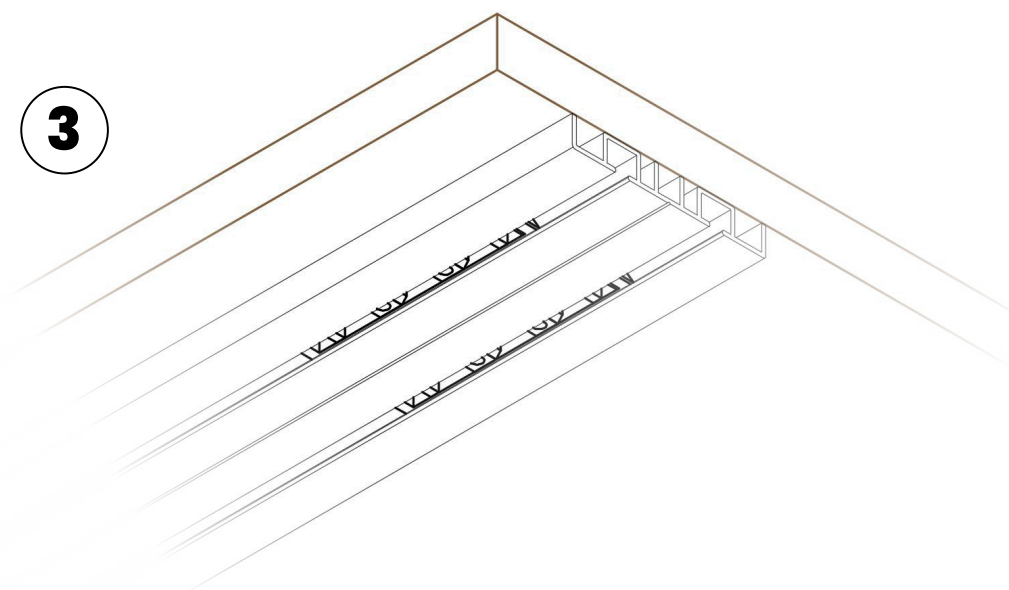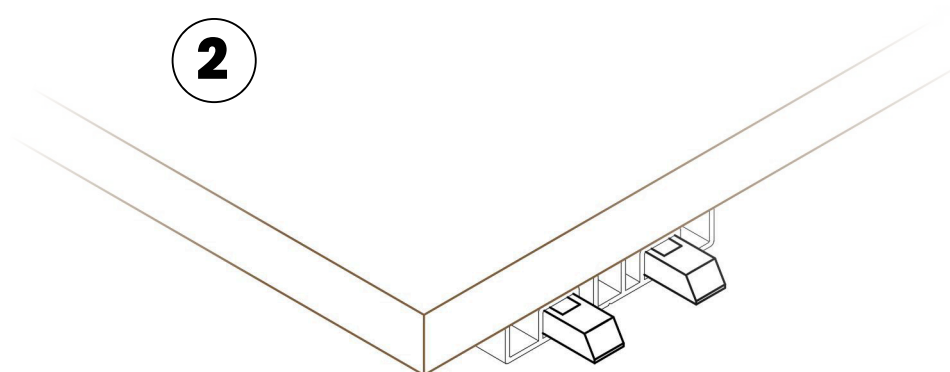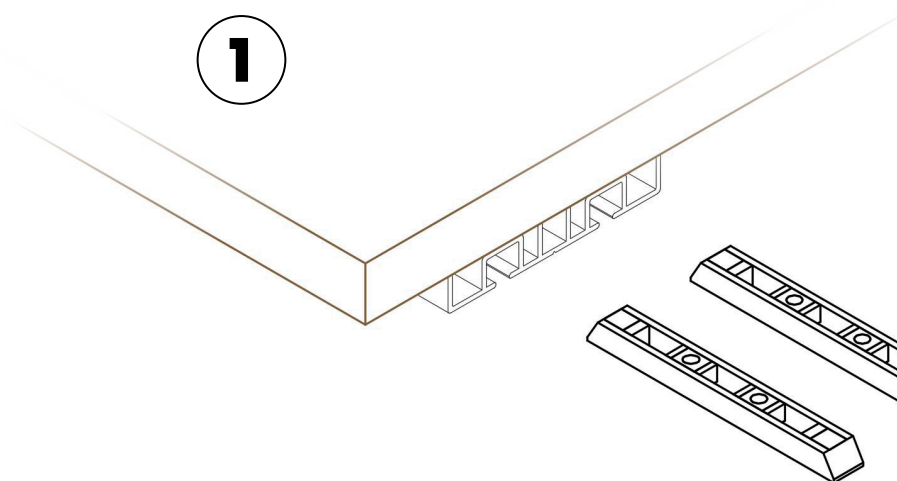




2. Position and secure the upper and bottom rails to the wooden panels, ensuring perfect alignment and level.

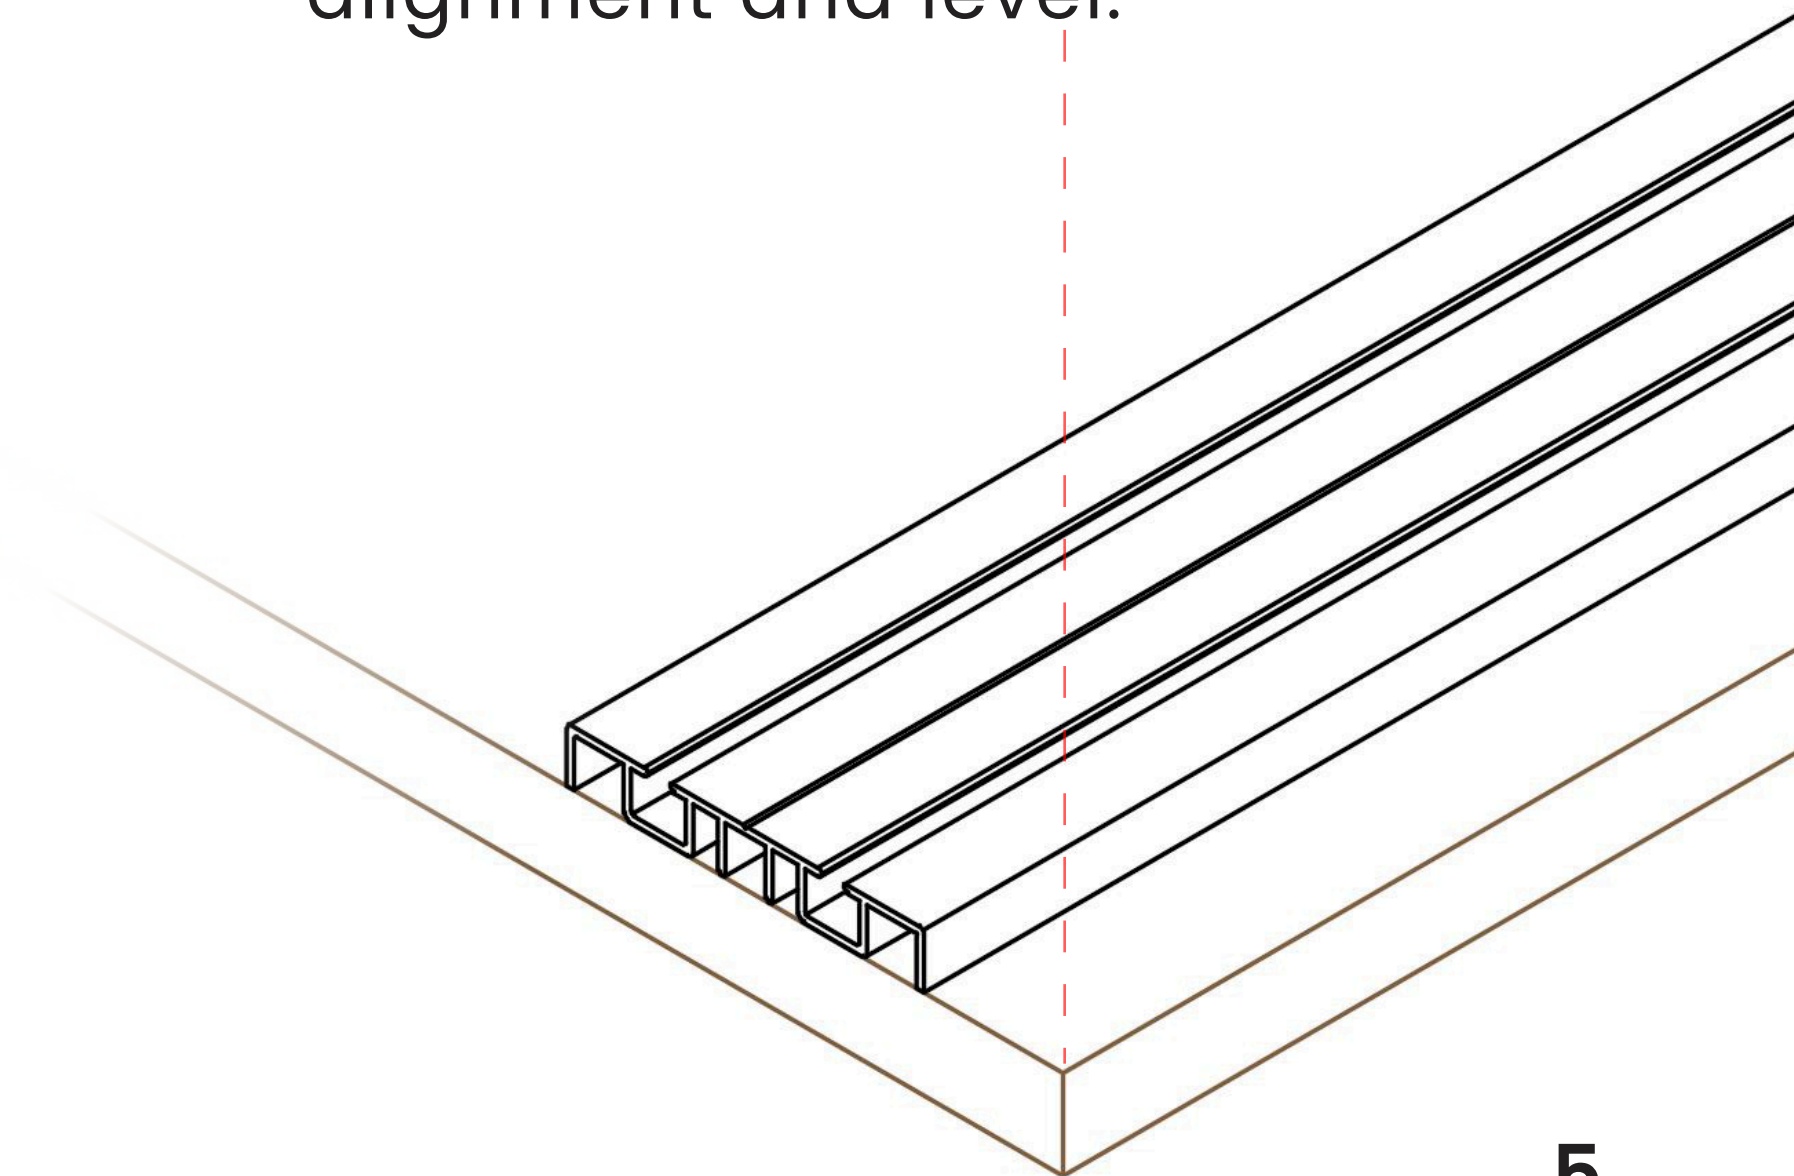

# SYSTEM INSTALLATION

## Choose Rail Position

Depending on the design requirement, position the rails at a distance from the closet edge ranging from **8 mm (minimum)** to **28 mm (maximum)**.

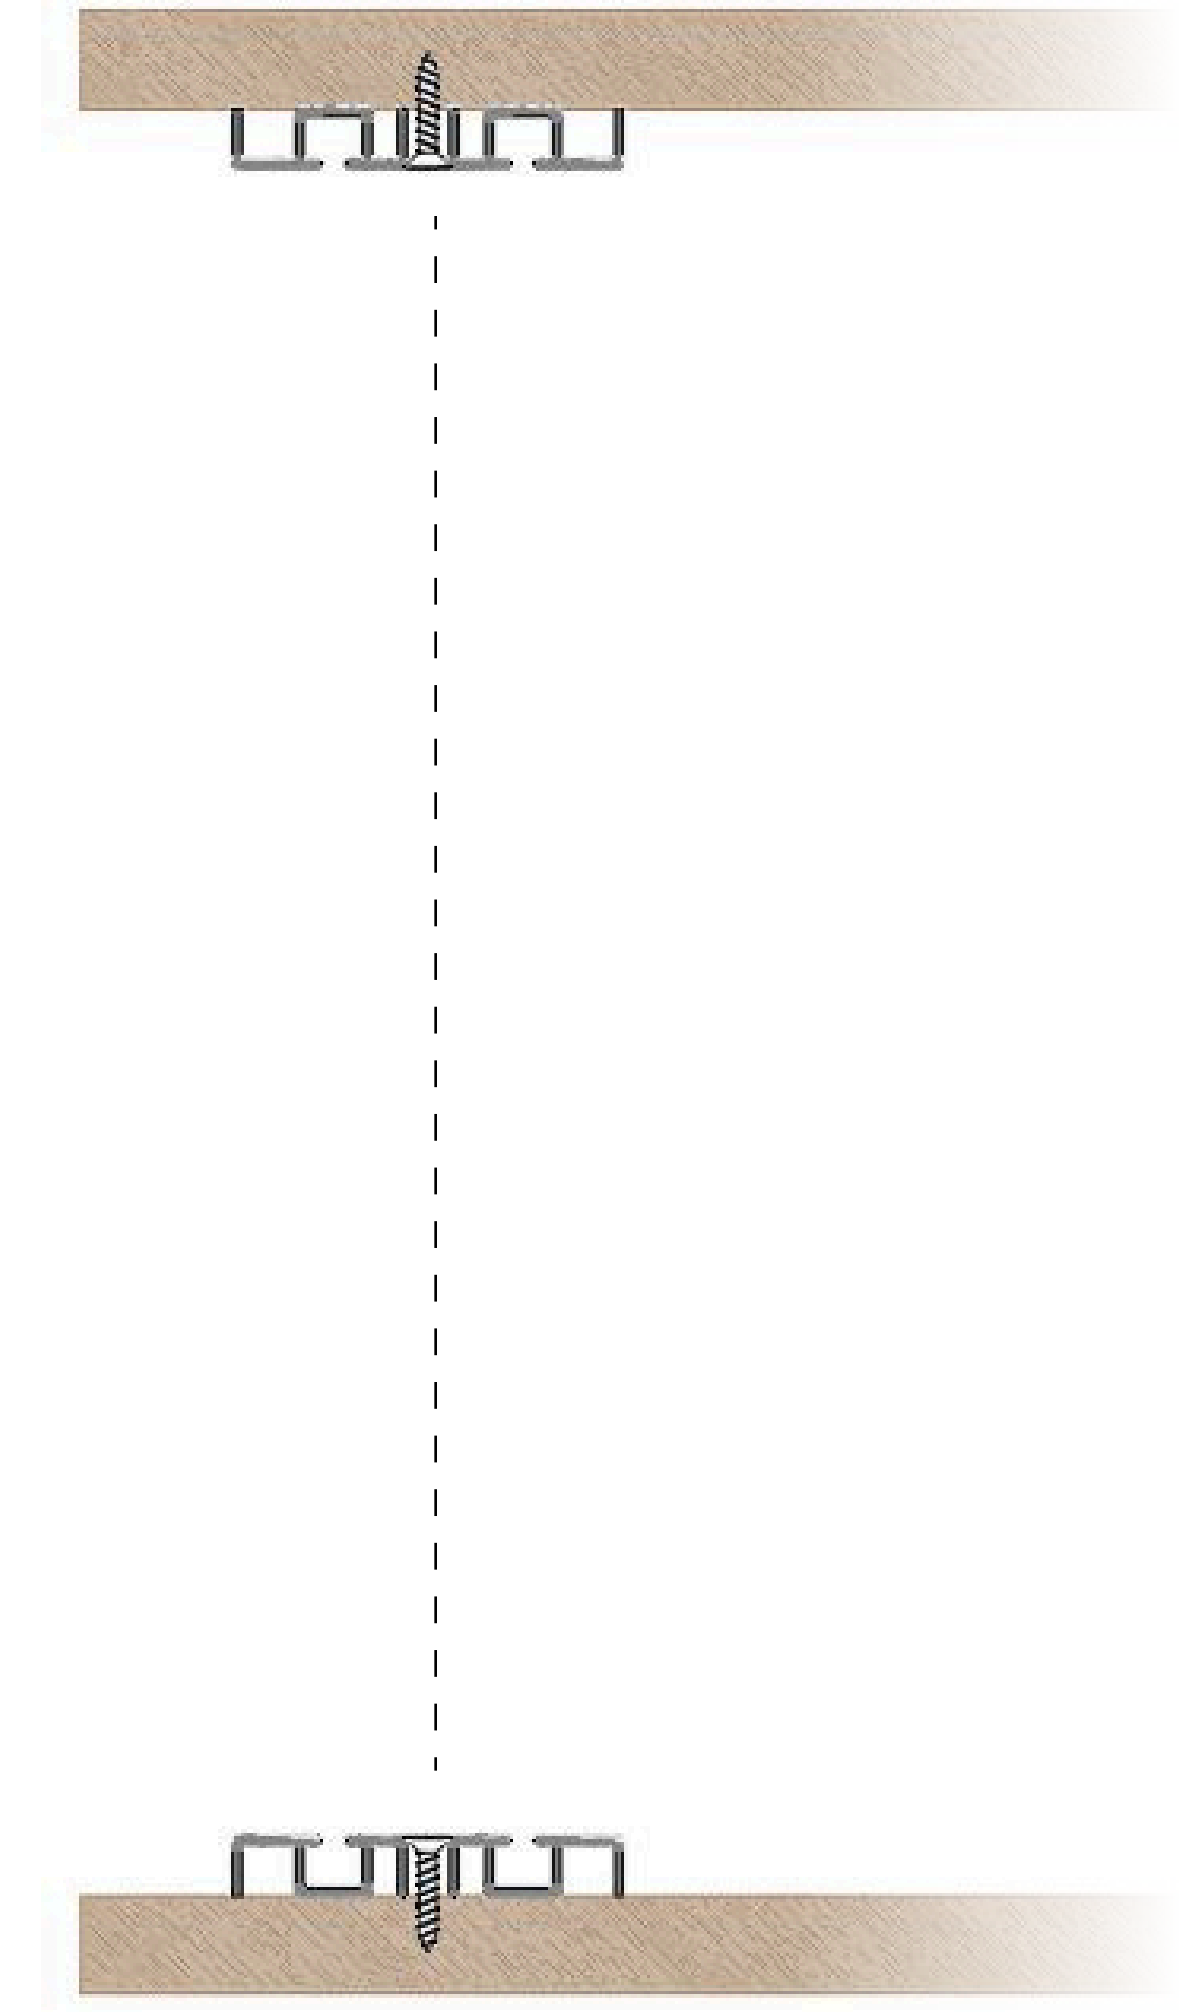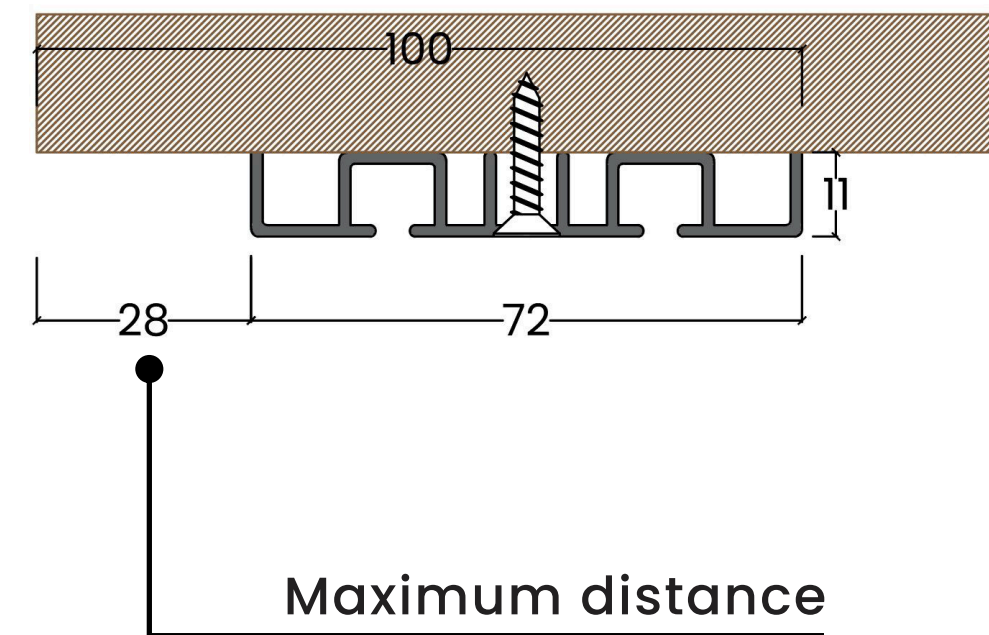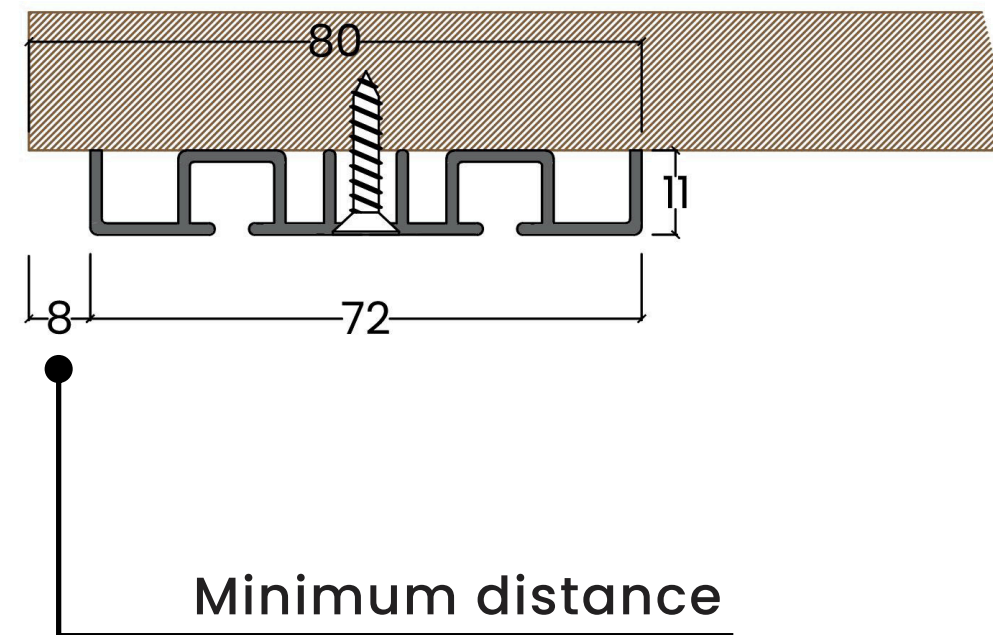

# SLIDING DOOR OPTIONS


## 2 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters



- **Plan View:** Shutters With Dimensions

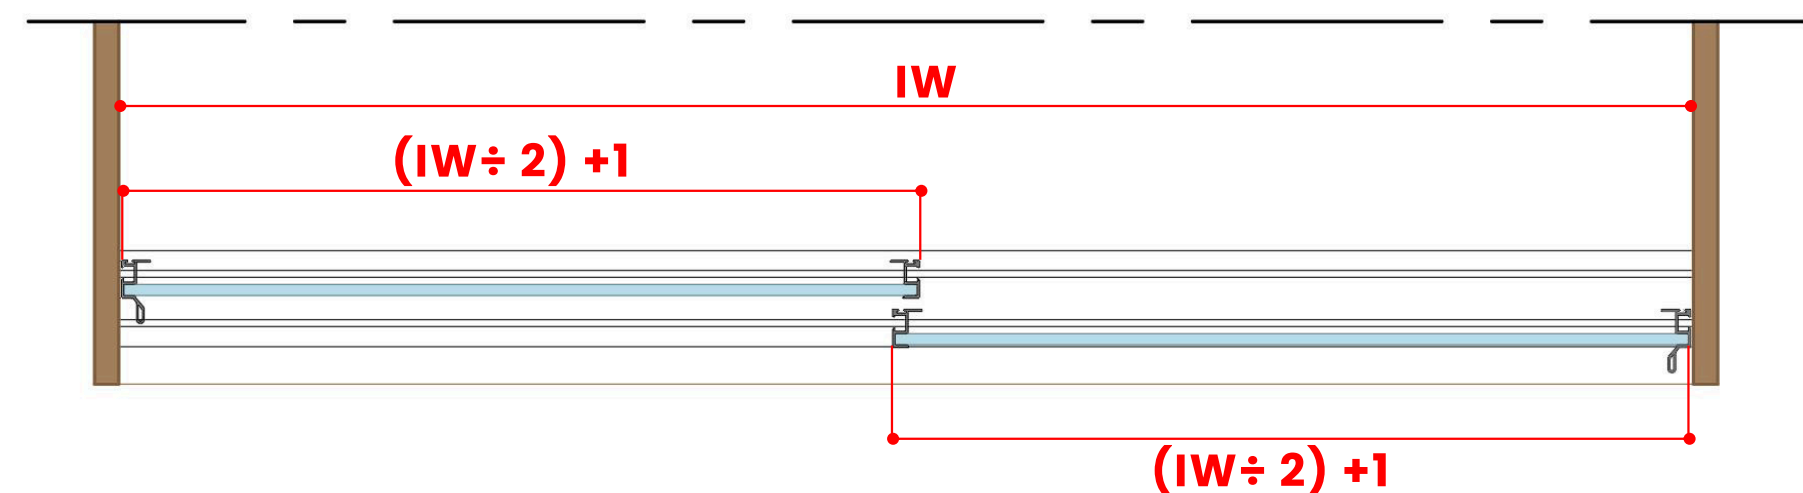

Note:  $IW$ =Inside Width

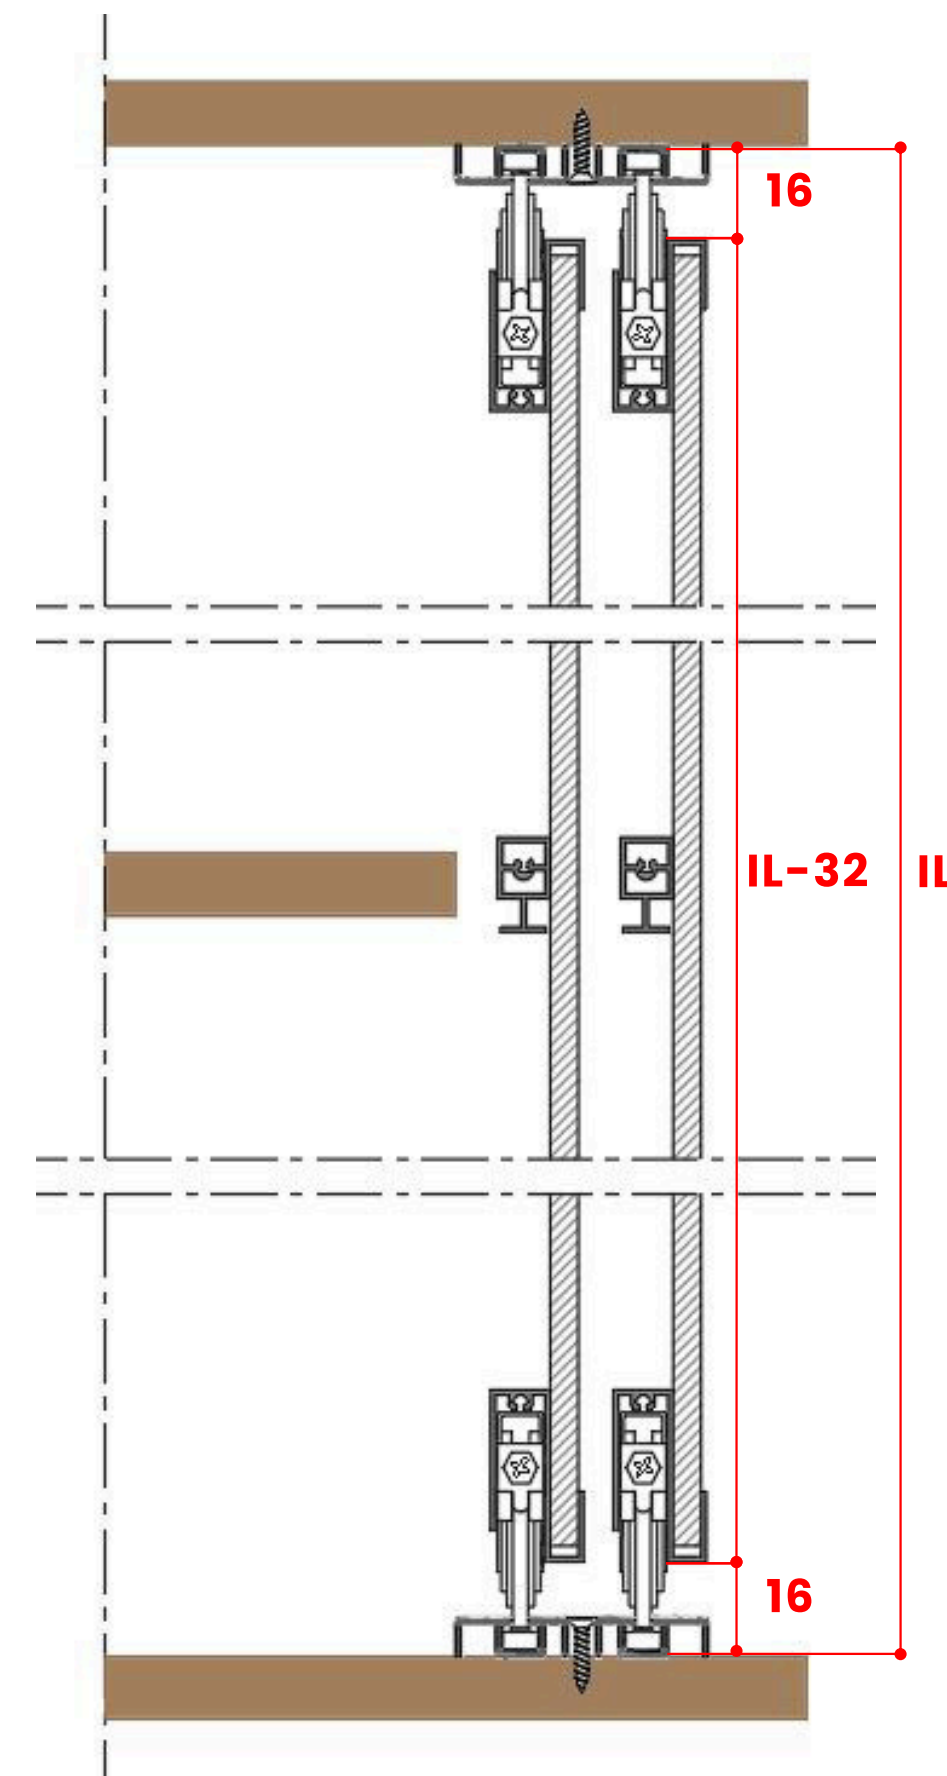

- **Section View:** Vertical Alignment And Shutter Dimensions

Note:  $IL$ =Inside Length




# SLIDING DOOR OPTIONS


## 3 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters

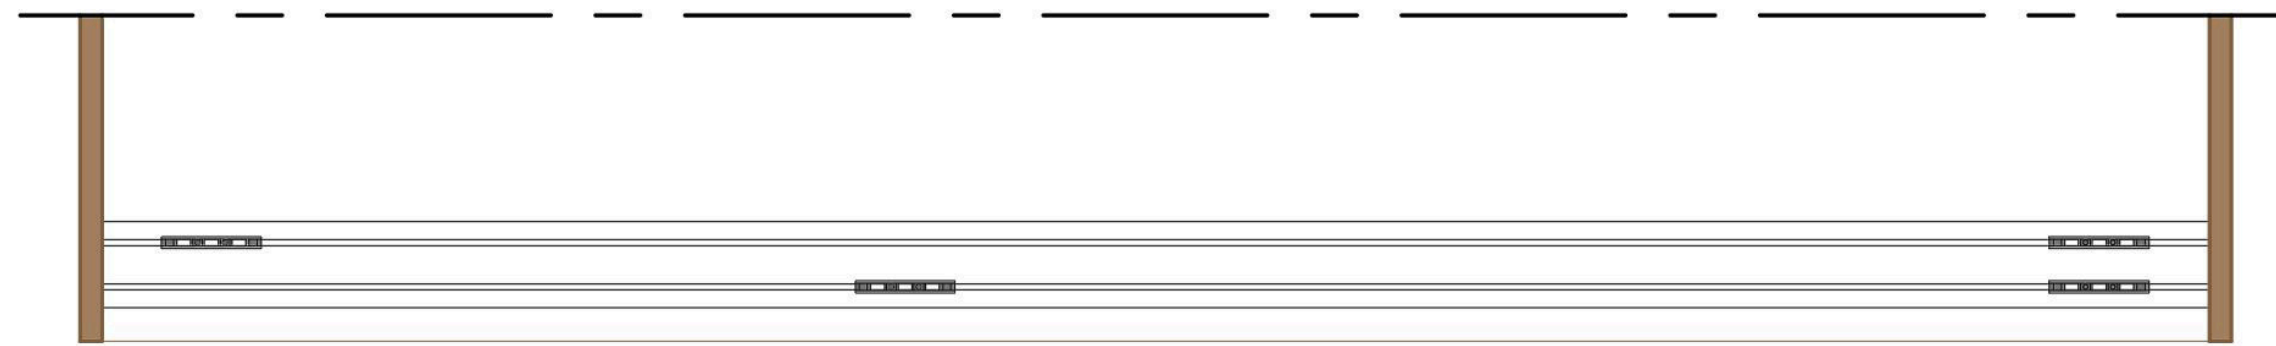

- **Plan View:** Shutters With Dimensions

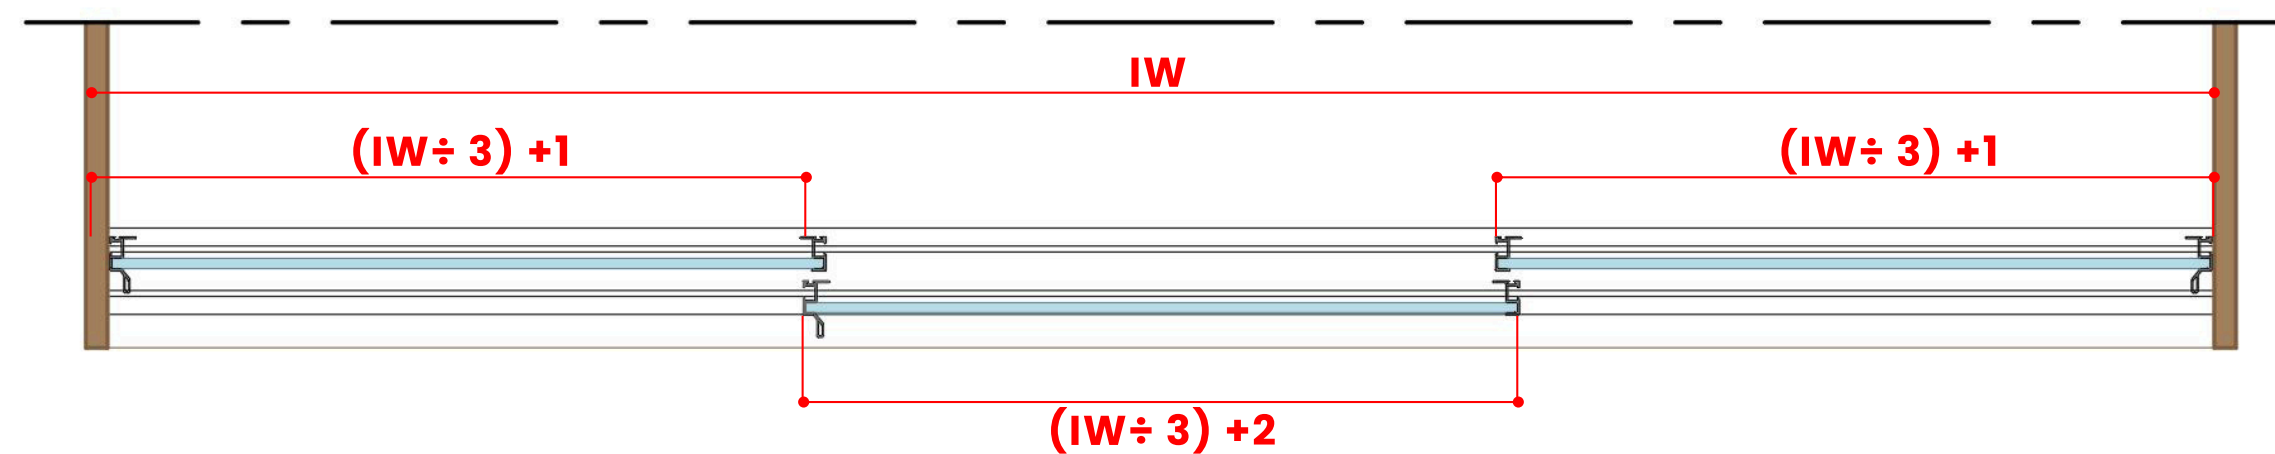

**Note:**  $IW$ =Inside Width

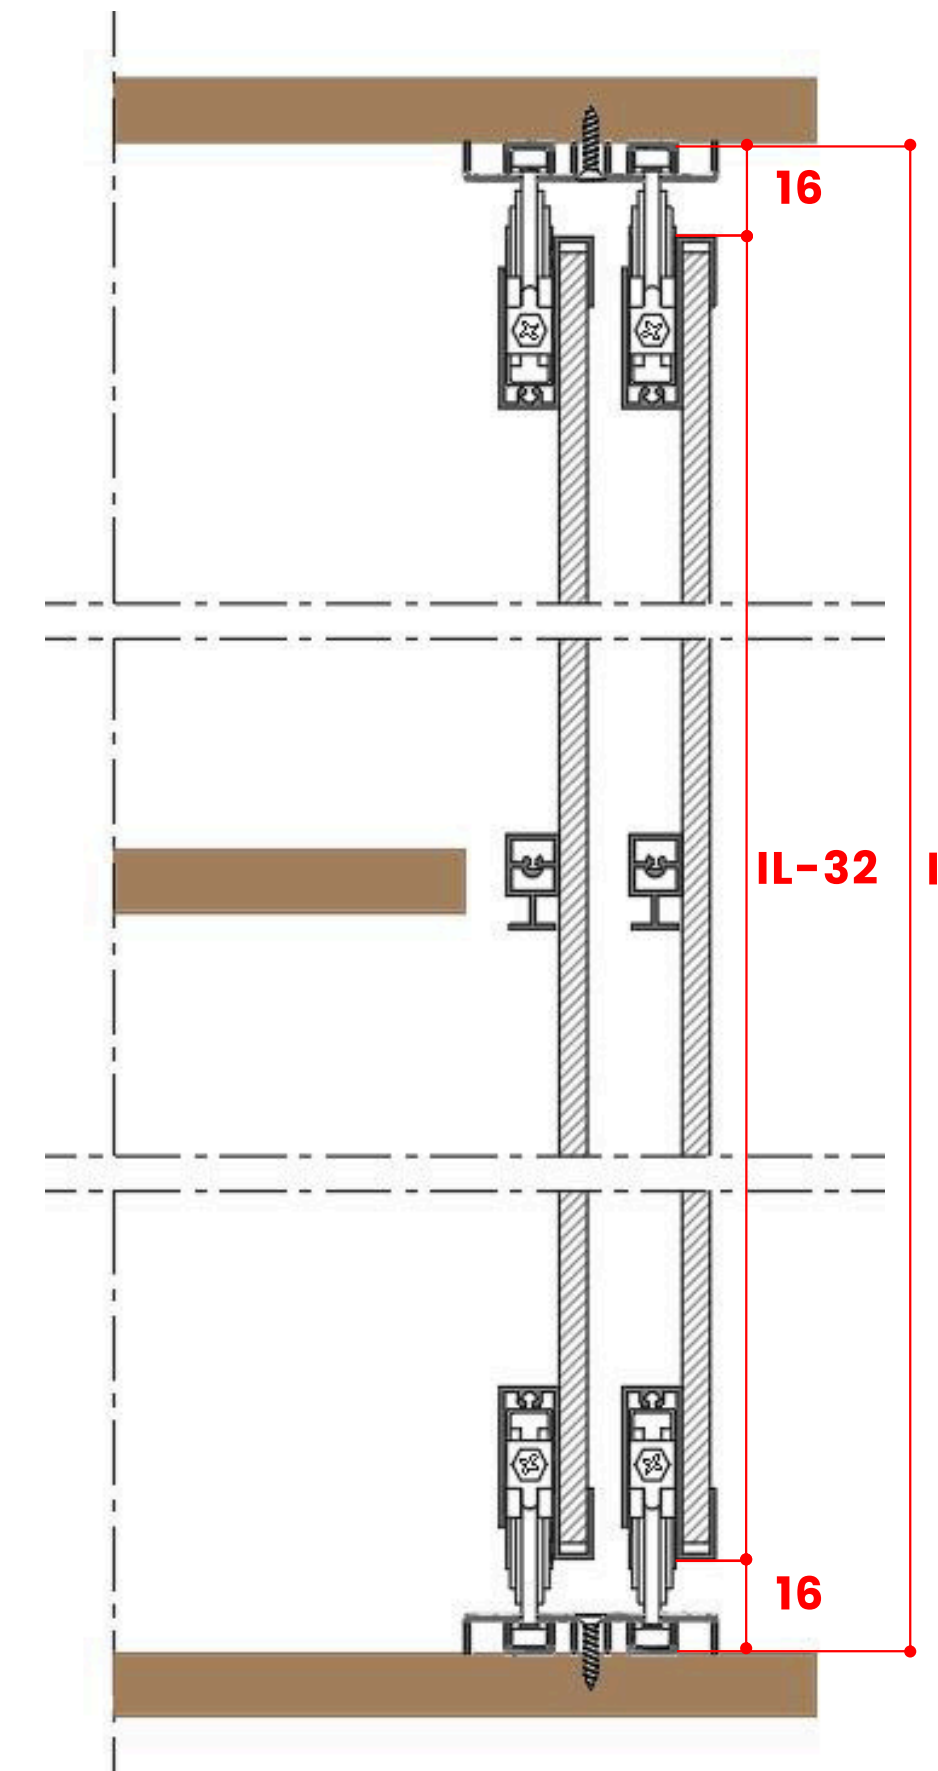

- **Section View:** Vertical Alignment And Shutter Dimensions

**Note:**  $IL$ =Inside Length




# SLIDING DOOR OPTIONS


## 4 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters

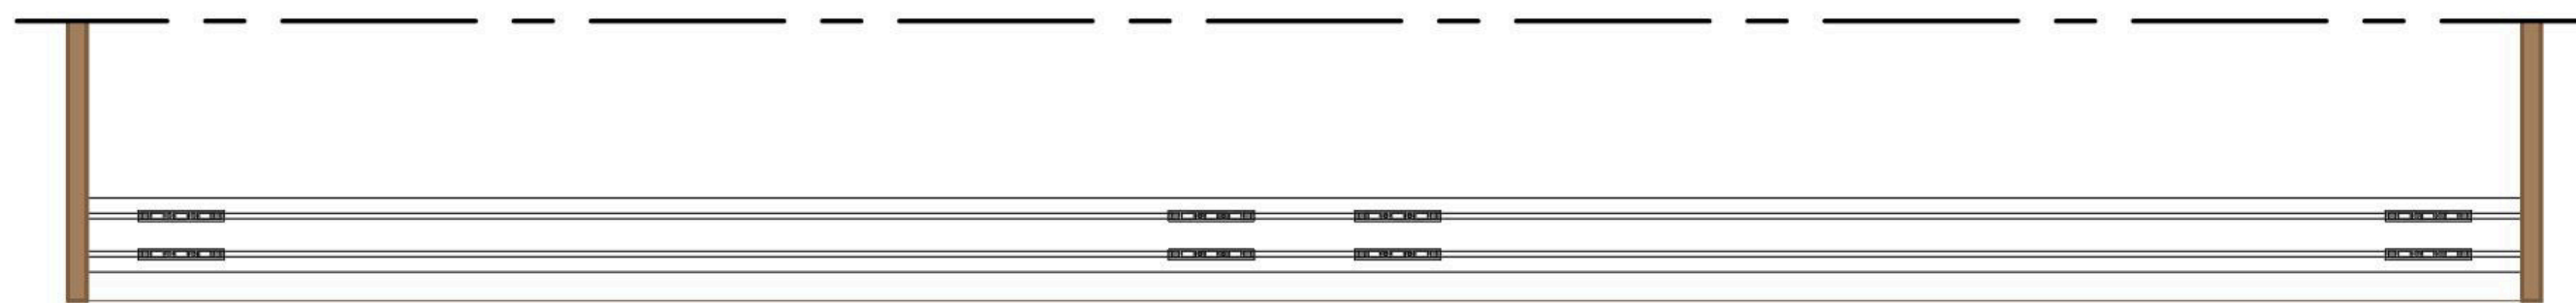

- **Plan View:** Shutters With Dimensions

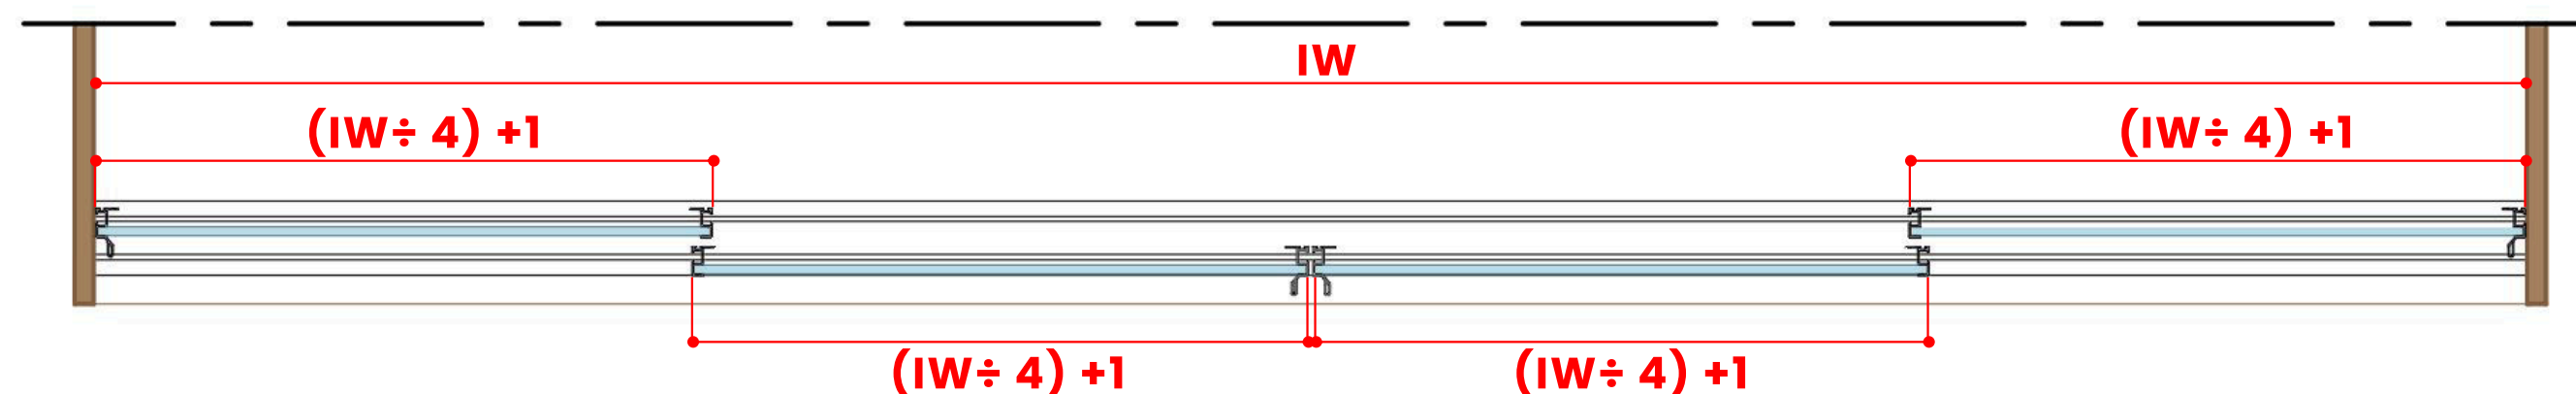

**Note:** IW=Inside Width

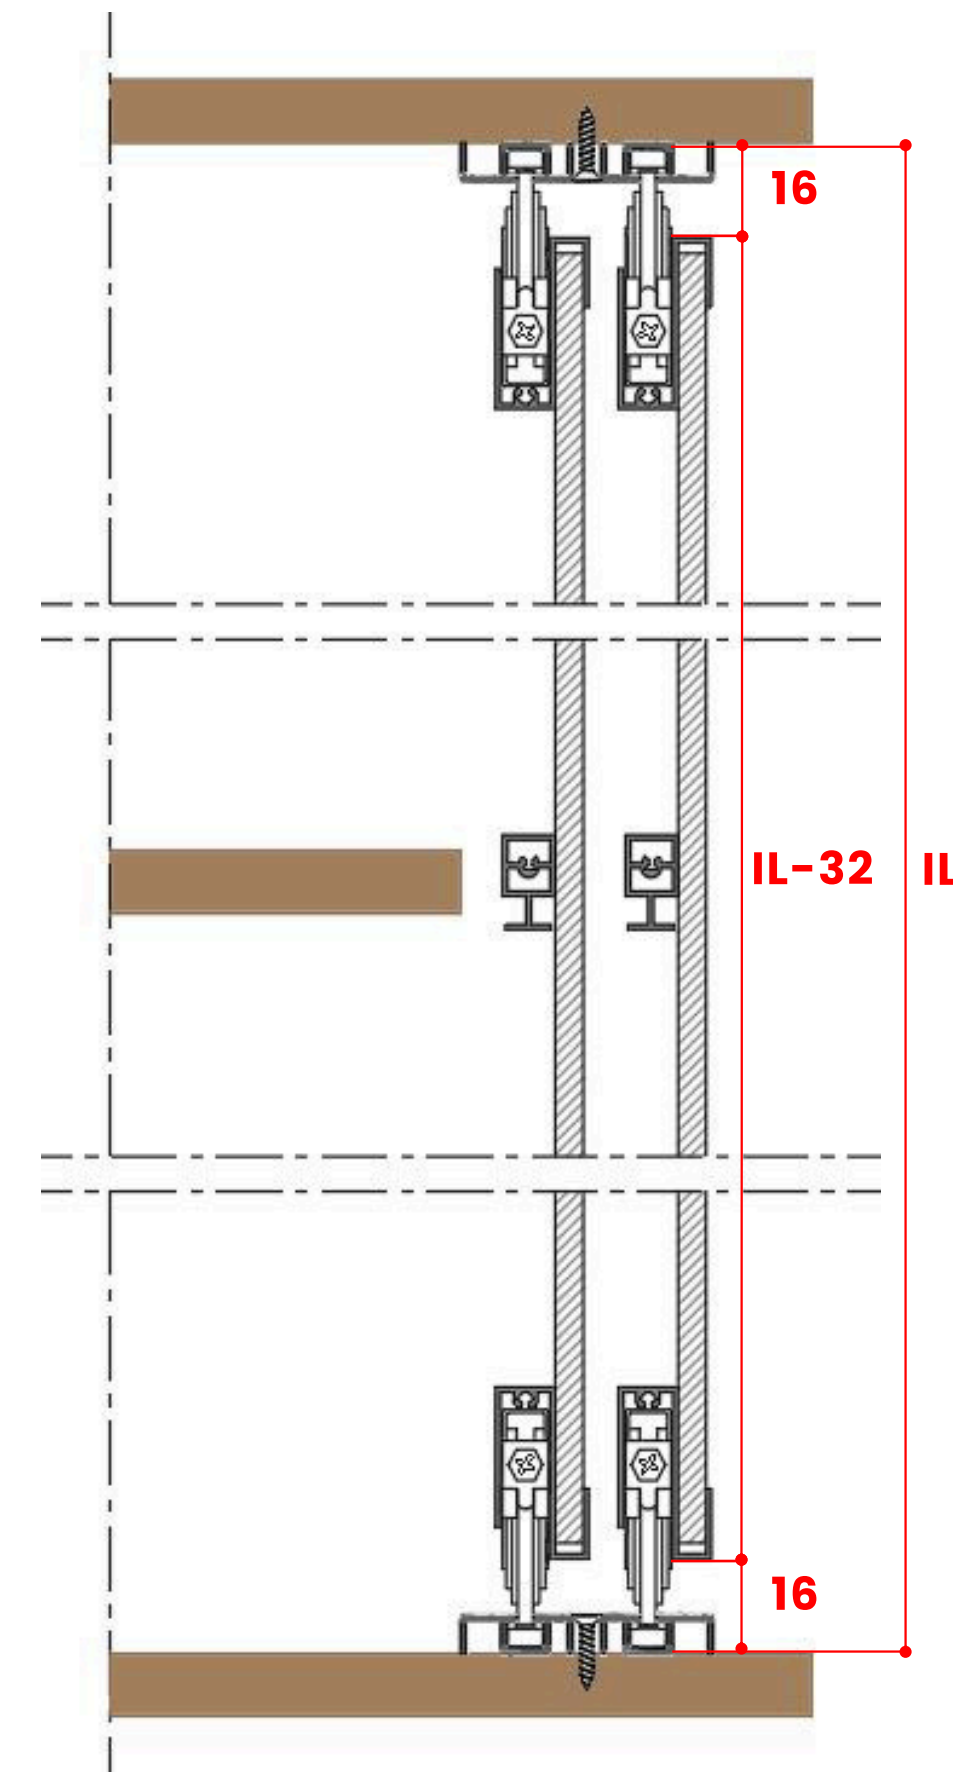


- **Section View:** Vertical Alignment And Shutter Dimensions


**Note:** IL=Inside Length

# SHUTTER DETAILS


- The groove shown in the drawing is **8 mm wide**. It can hold **wood or glass panels** from **4 mm to 8 mm thick**.
- **4 mm Glass** is installed using our special rubber.

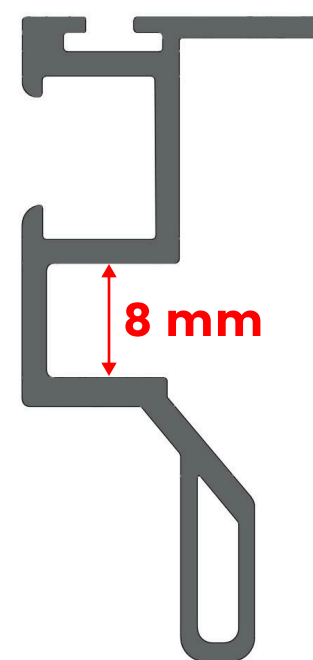

- Shutter frame with integrated handle

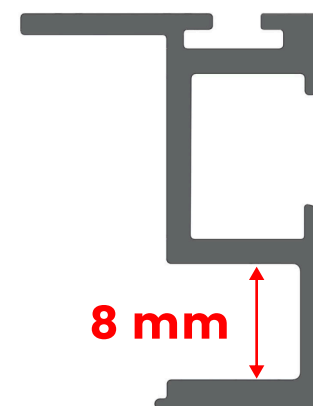

- Shutter frame without handle

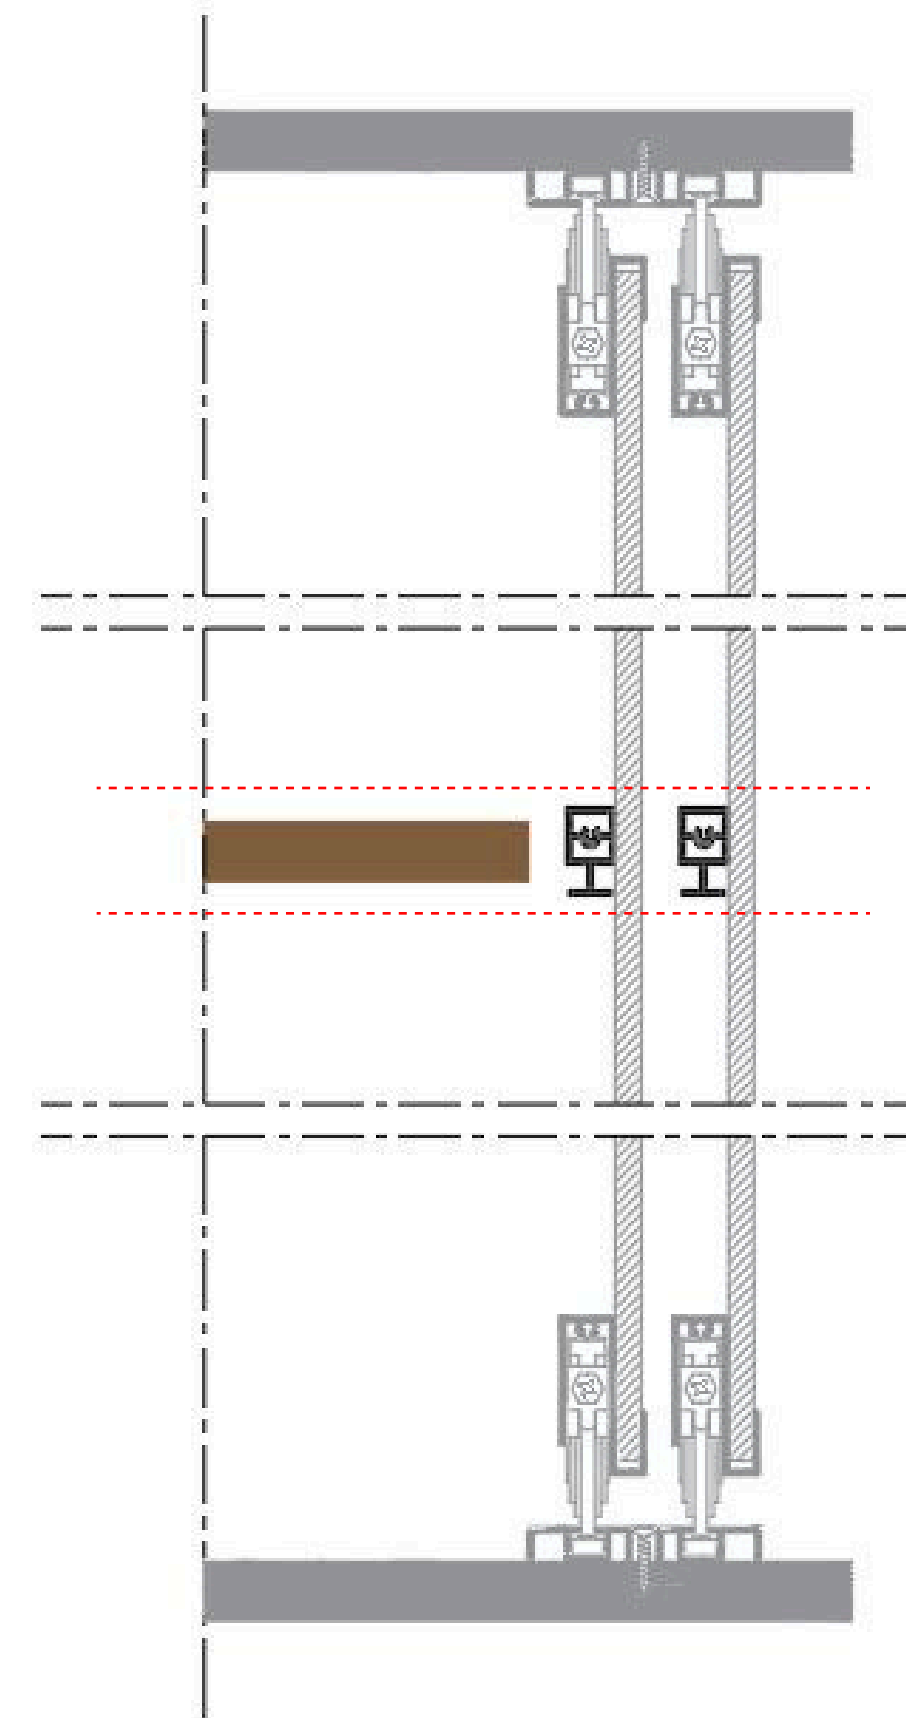




Section View – Closet Installation

- **Support profile** fixed to the glass shutter. **Shelves can be placed optionally**, but **symmetry is recommended** for strength and balance.



# GLASS AND COLOR OPTIONS

- Color Options

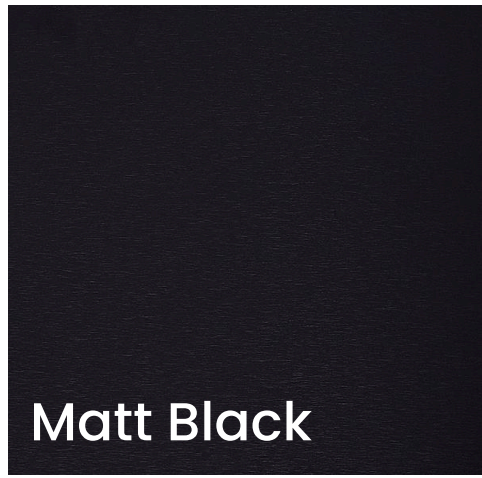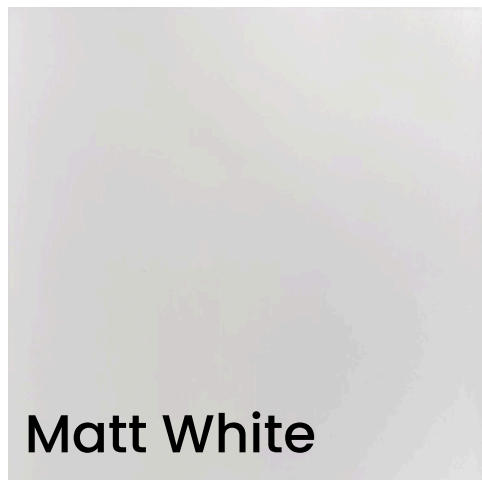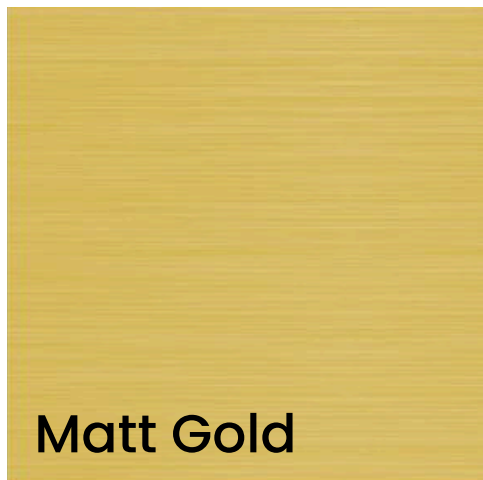

- Glass Options


|                   |                    |                    |                |
|-------------------|--------------------|--------------------|----------------|
| Fumé              | Bronze             | Clear              | Frosted Ribbed |
| White Mirror      | Bronze Mirror      | Black Mirror       |                |
| Ribbed            | Back Painted Black | Back Painted White |                |
| Reflective Bronze | Reflective Black   | Frosted            |                |








# SOFT-CLOSE SYSTEM

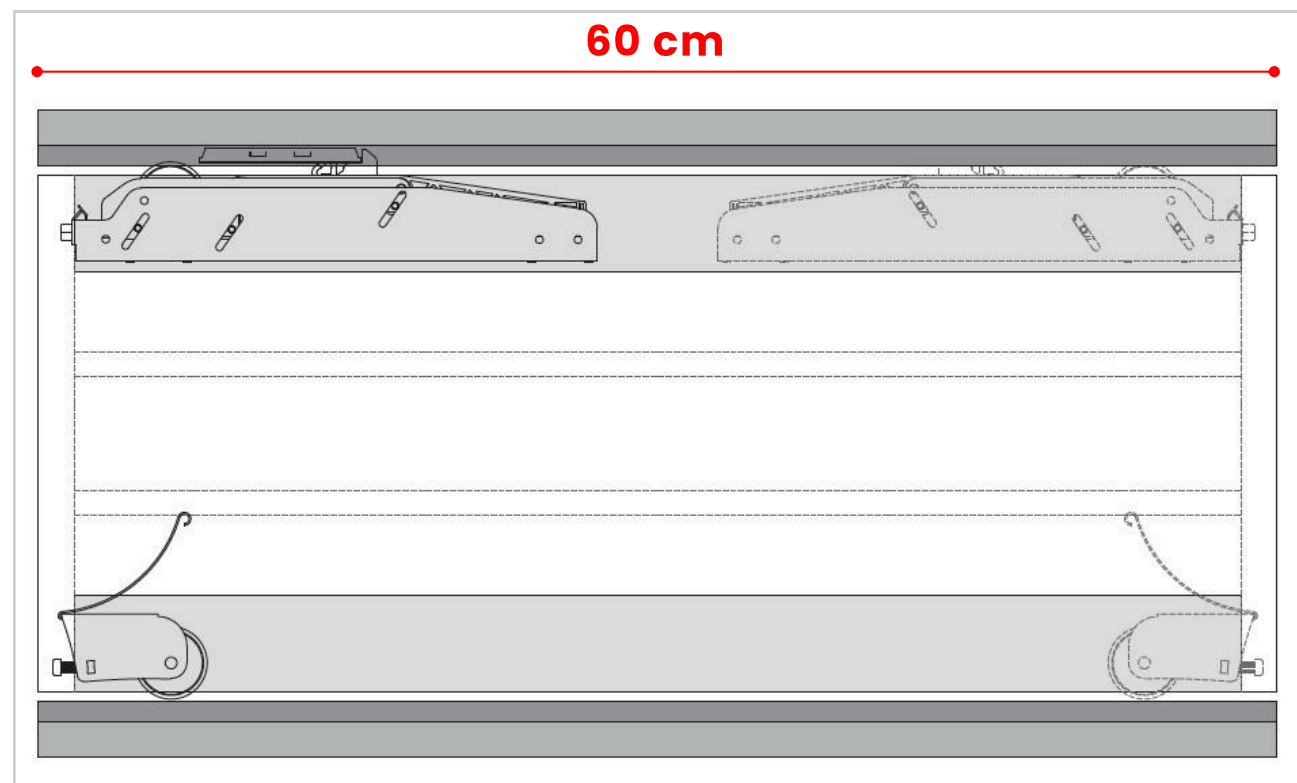


- For shutters with a **double soft-close** system, the **minimum width of the shutter required is 60 cm.**

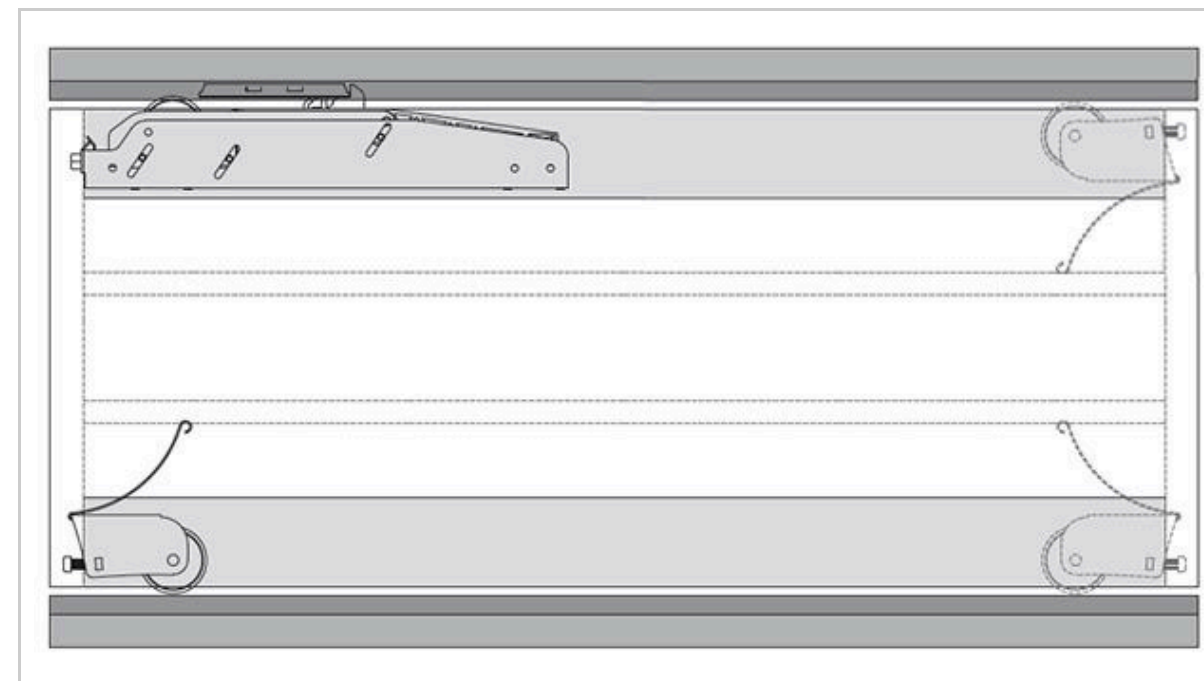


- In a **3-door setup**, the **two back shutters** are fitted with **single soft-close**, positioned on the handle side .


# SOFT-CLOSE SYSTEM

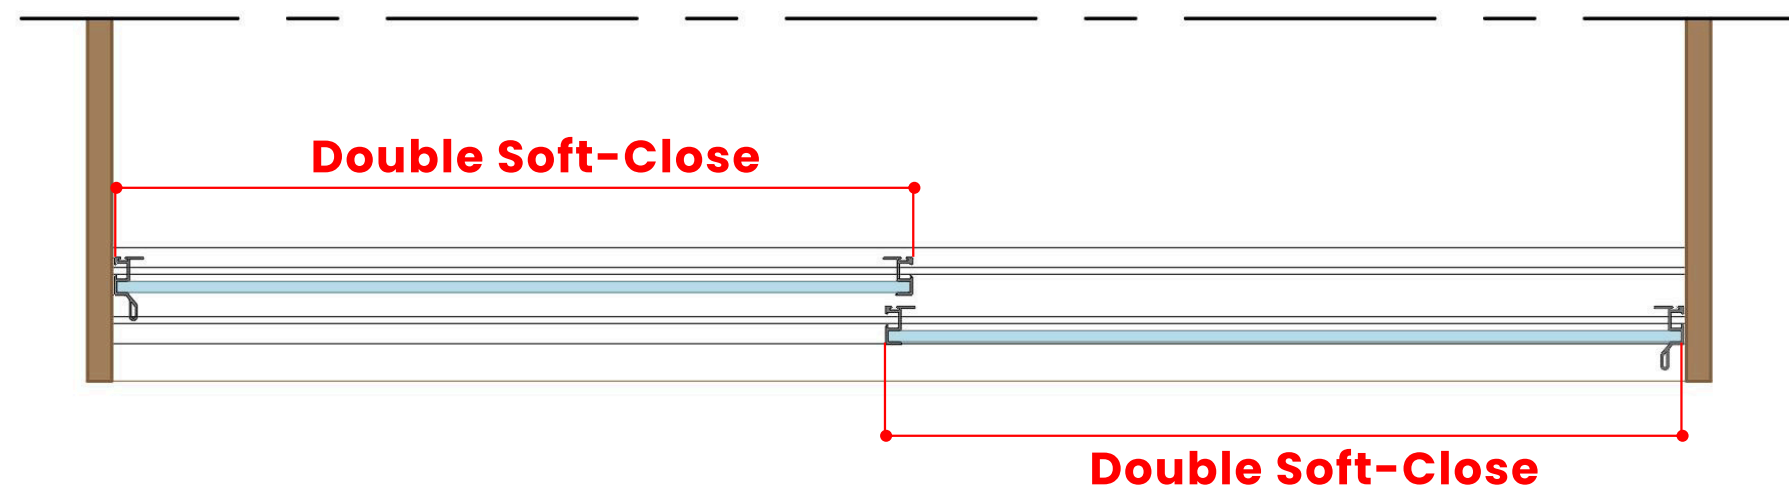

- Sliding Door Option - 2 Doors

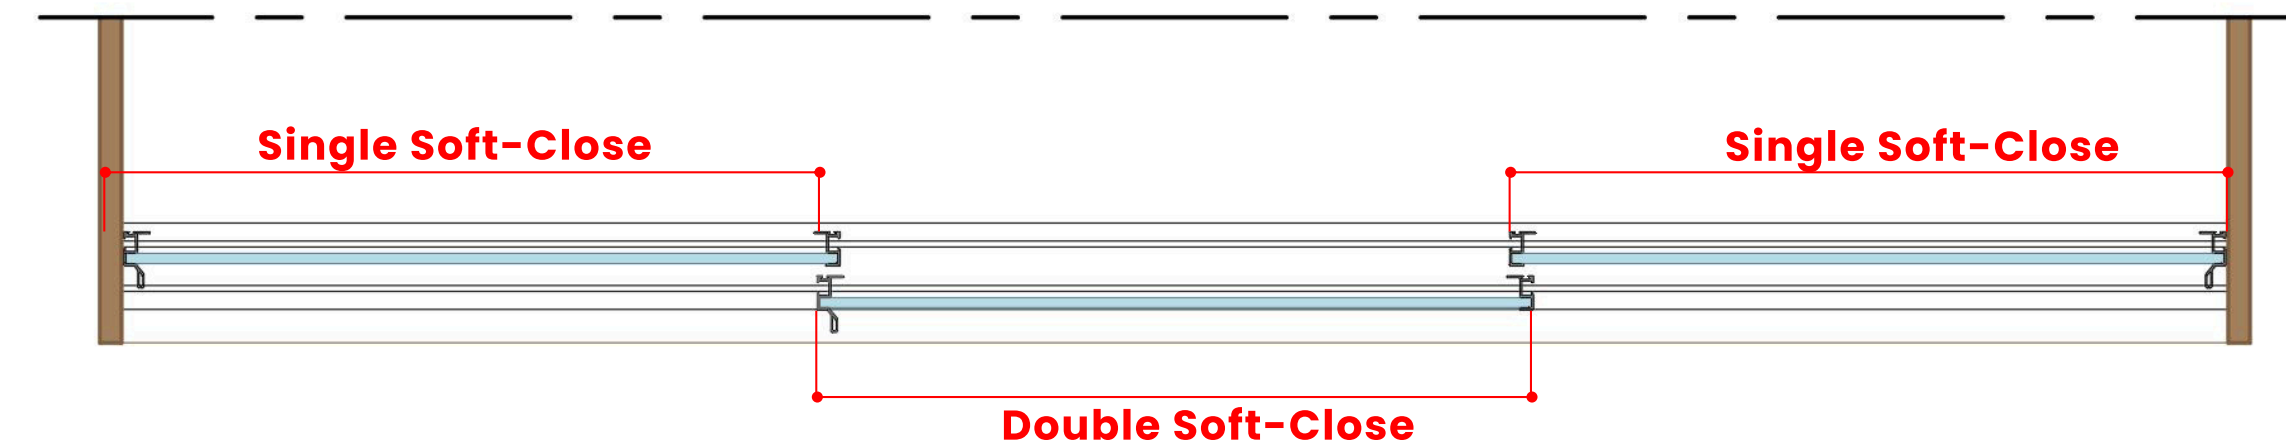

- Sliding Door Option - 3 Doors

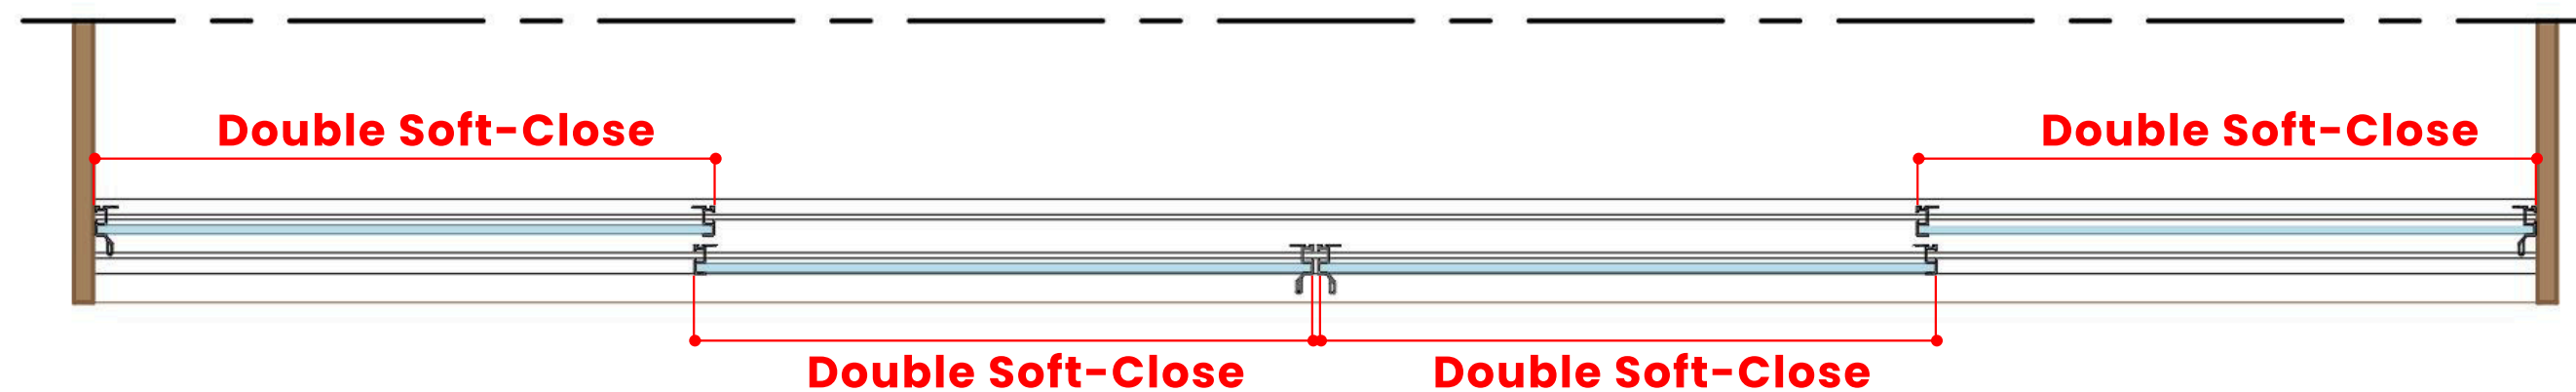

- Sliding Door Option - 4 Doors





**NATHALIUM**  
Elevating Spaces with Italian Precision



# Closets

## **Nathalium .Co**

Jamal Abdul Nasser Str. – Al Bahsas – Tripoli, Lebanon

Tel: 06/411790 , 06/411 791 – cell: 71/847529

**[www.nathalium.com](http://www.nathalium.com) – [info@nathalium.com](mailto:info@nathalium.com)**

