



NATHALIUM

Elevating Spaces with Italian Precision

CLOSETS



ARONA

TABLE OF CONTENT

01	Introduction	03	05	Glass Wood configuration	
02	System Installation			Wooden Back Shutter	11
	Prepare And Install Rails	05		Groove Requirement	12
	Choose Rail Position	06	06	Soft-Close System	14-15
03	Sliding Door Options		07	Corner Details	16
	2 Door Configuration	07	08	Glass and color Options	17
	3 Door Configuration	08			
	4 Door Configuration	09			
04	Shutter Details	10			

INTRODUCTION


The Arona Closet System is designed with functionality, durability, and clean design in mind. This catalogue provides detailed information on the installation process, including rail fixing and positioning, shutter profiles with dimensions, and available configurations for 2-door, 3-door, and 4-door systems. The catalogue also covers the soft-close mechanism for smooth and reliable operation.




SYSTEM INSTALLATION

Prepare and Install Rails

1. Insert the adapters into the **upper rail** to prepare for door installation.

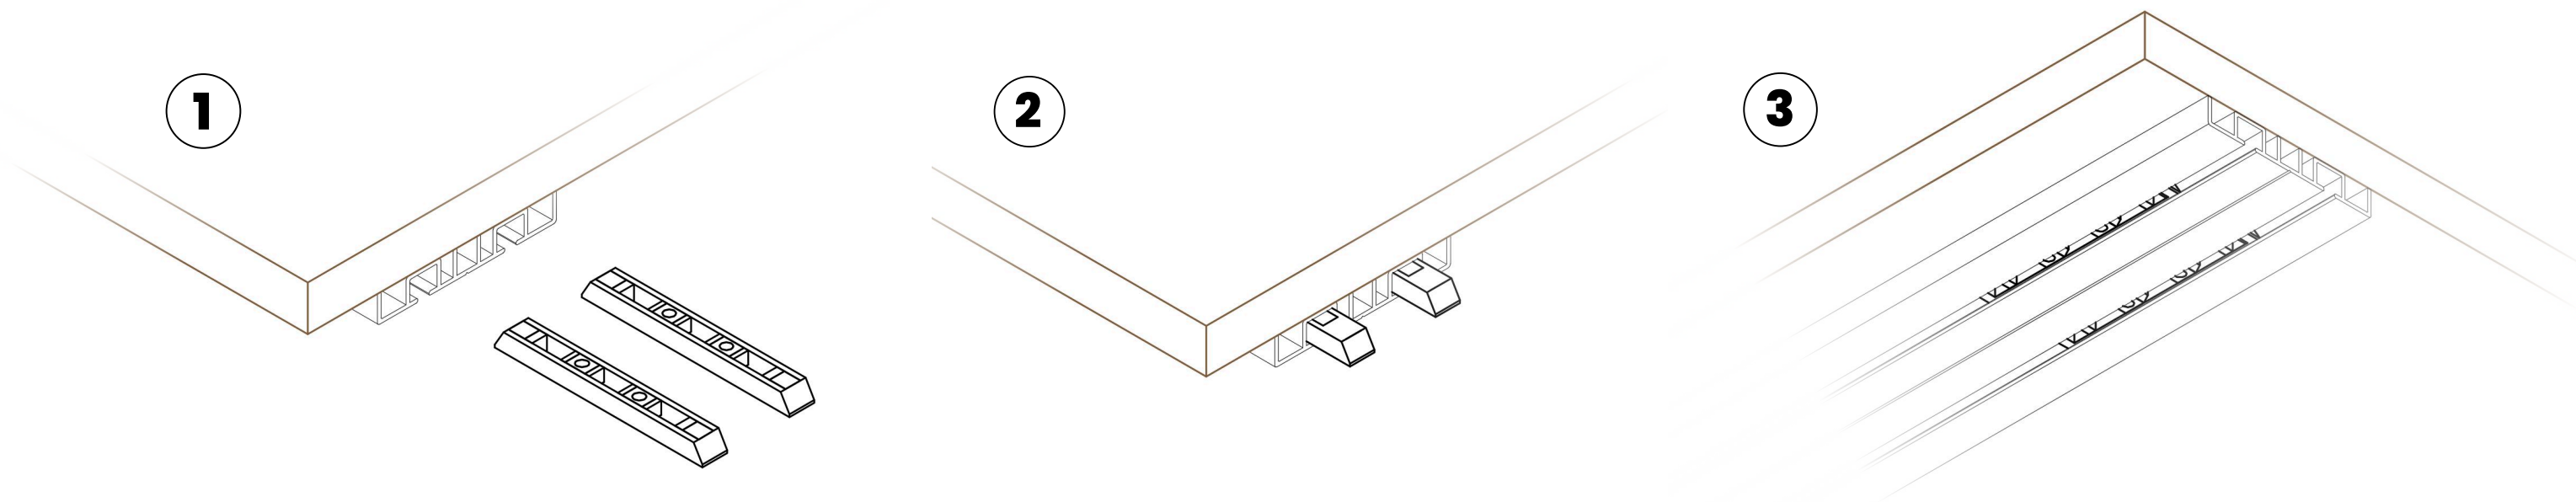




2. Position and secure the upper and bottom rails to the wooden panels, ensuring perfect alignment and level.

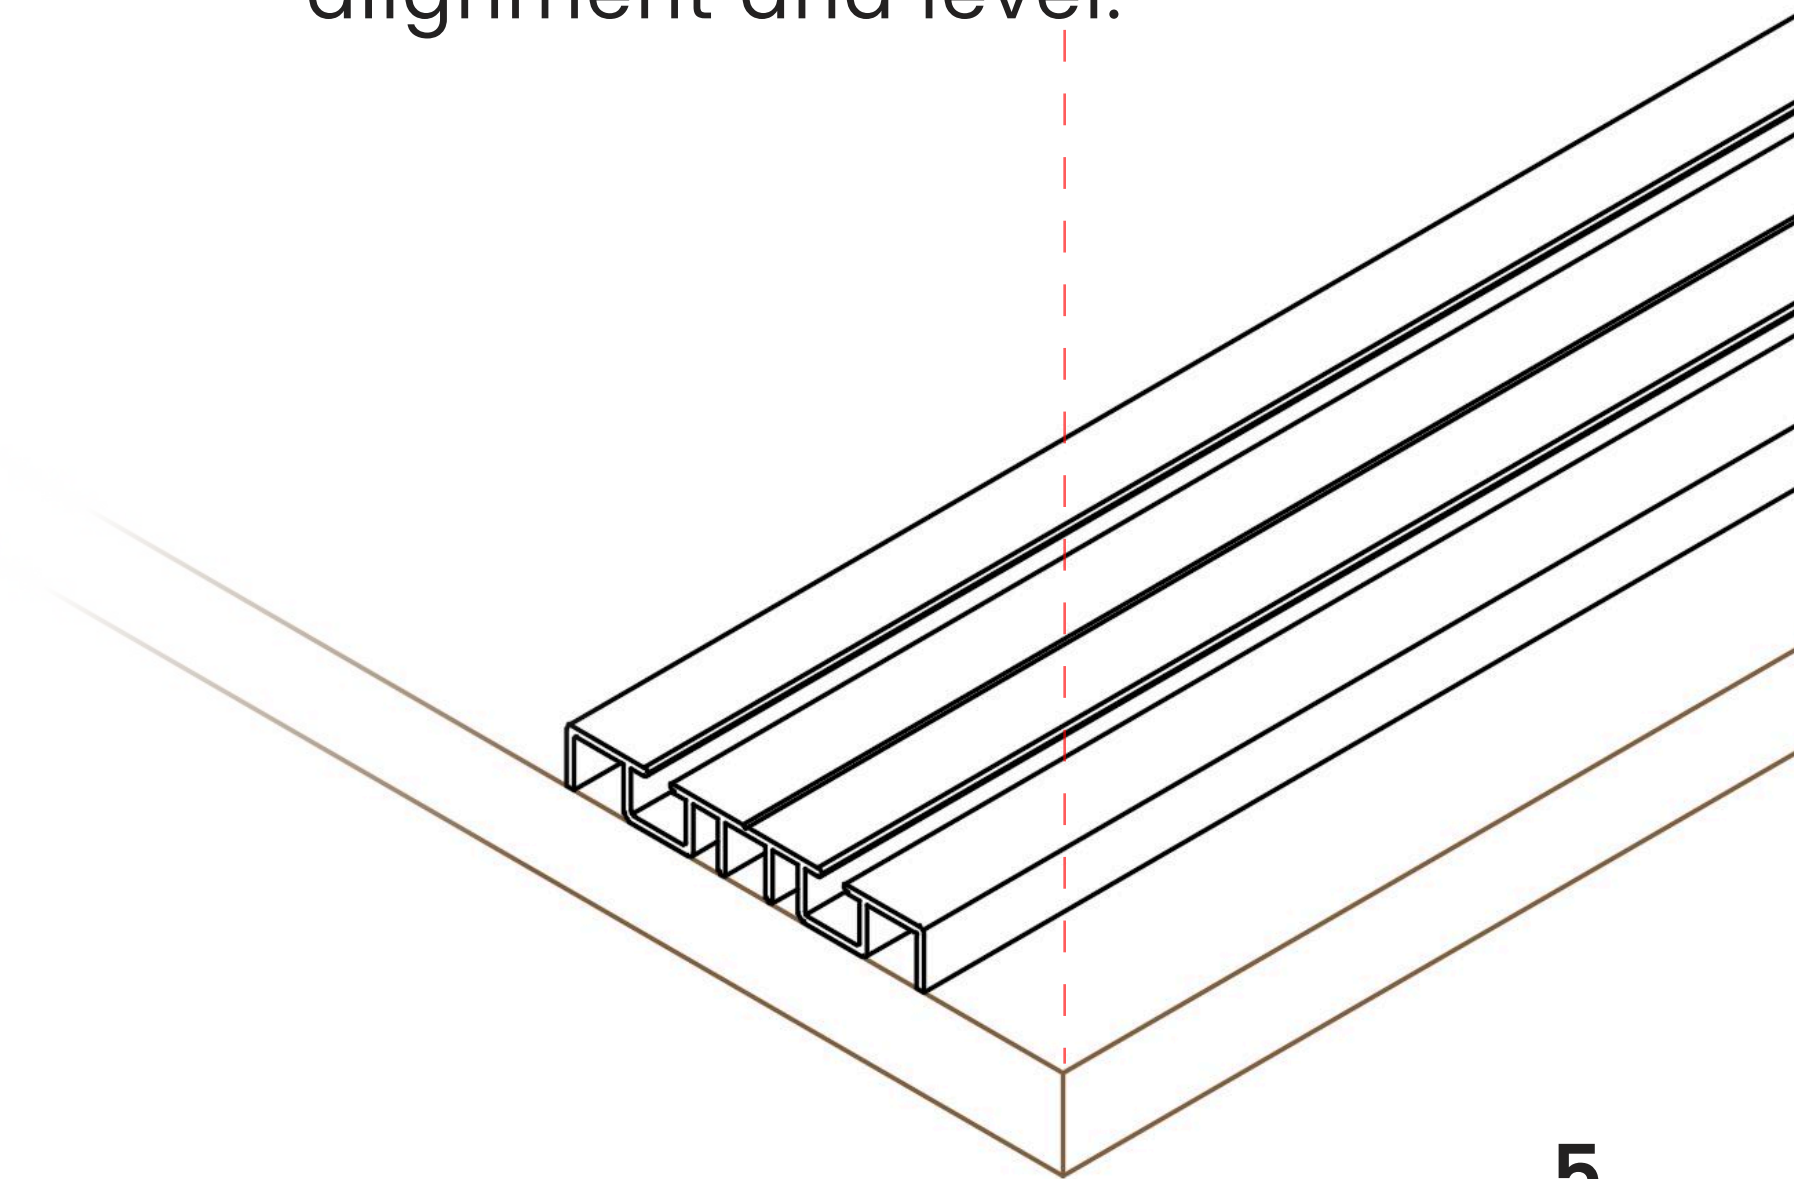

SYSTEM INSTALLATION

Choose Rail Position

Depending on the design requirement, position the rails at a distance from the closet edge ranging from **8 mm (minimum)** to **28 mm (maximum)**.

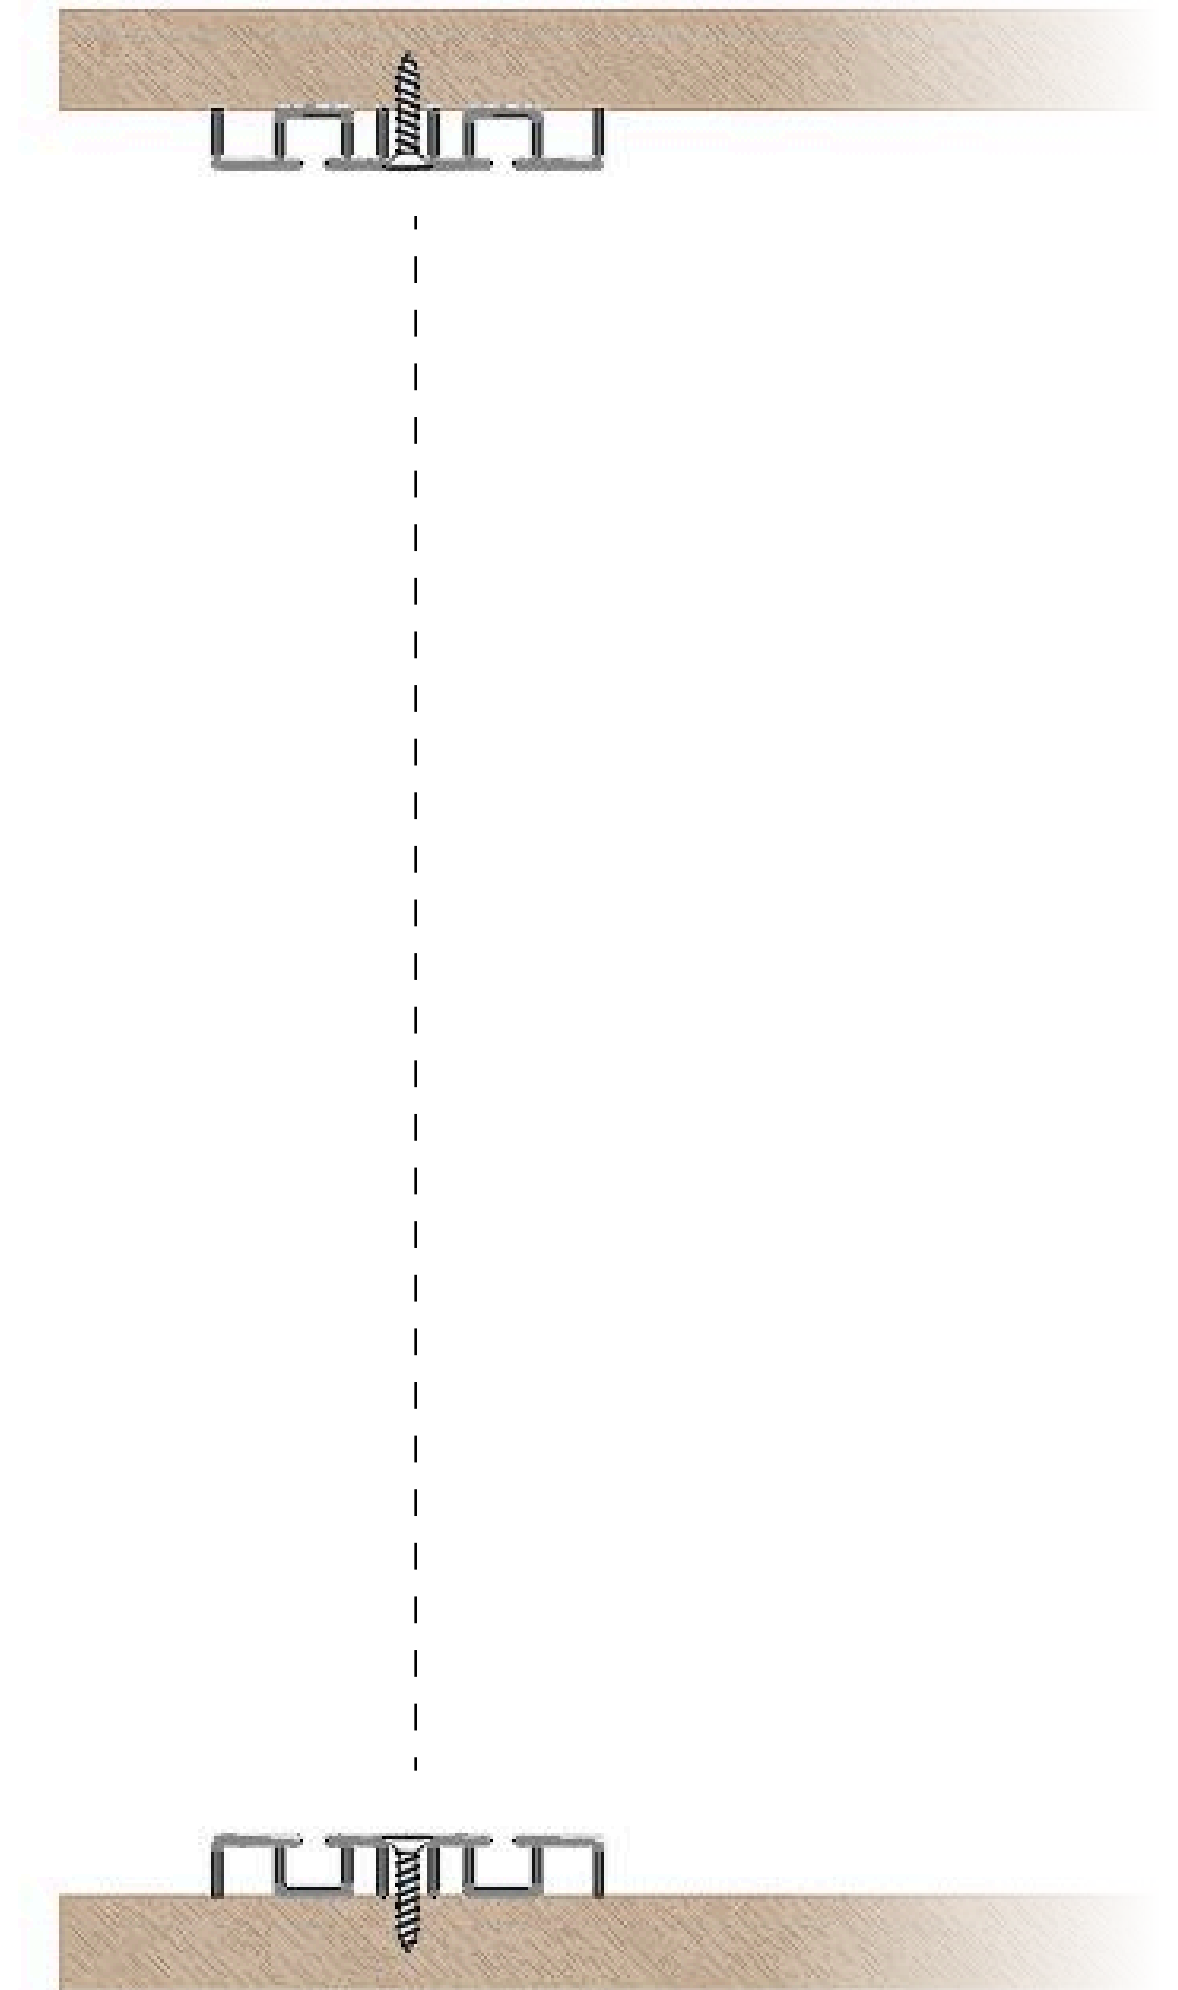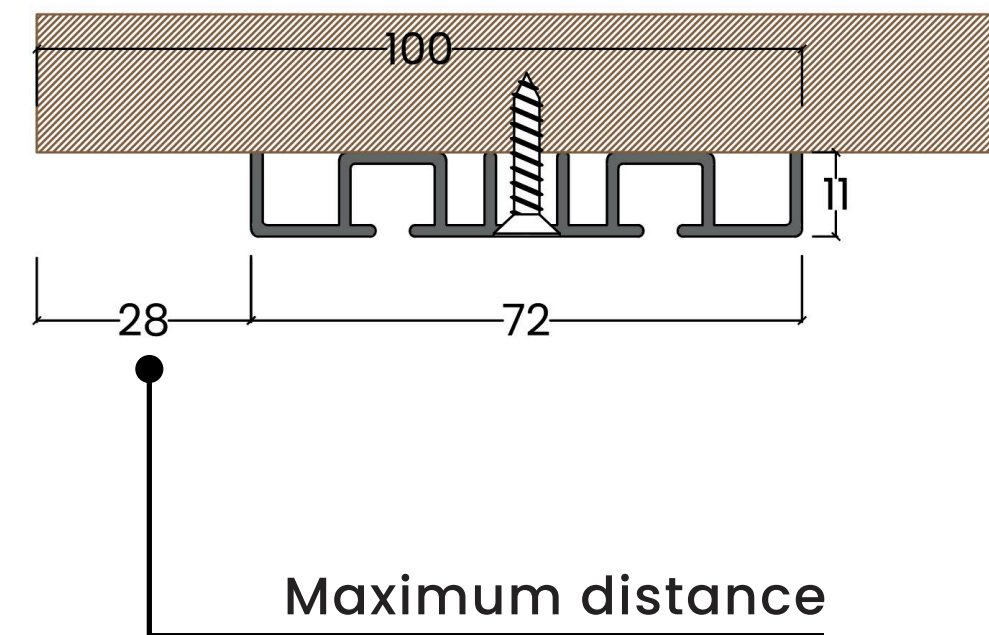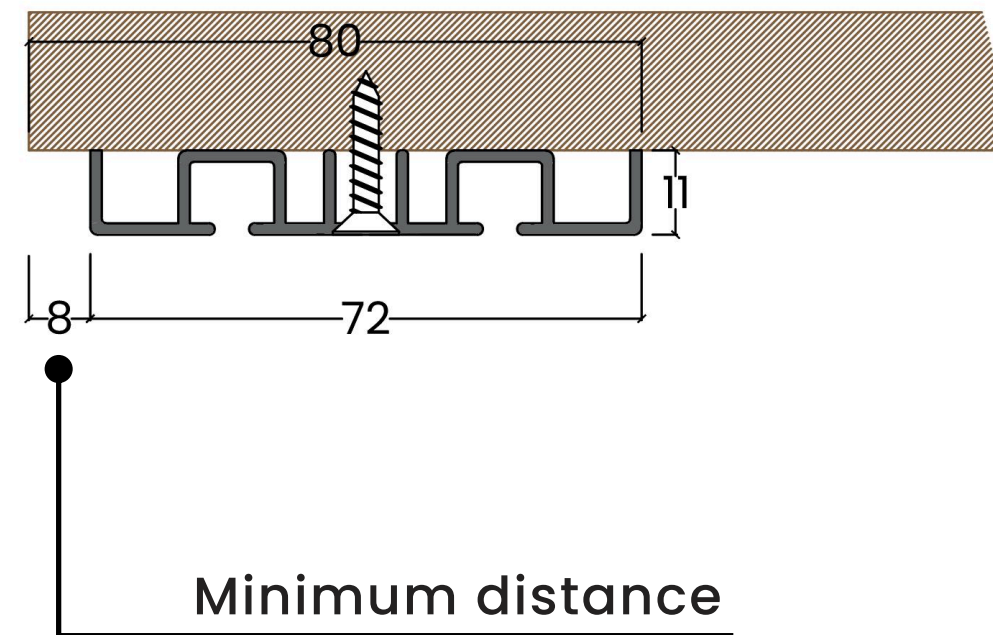


SLIDING DOOR OPTIONS


2 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters

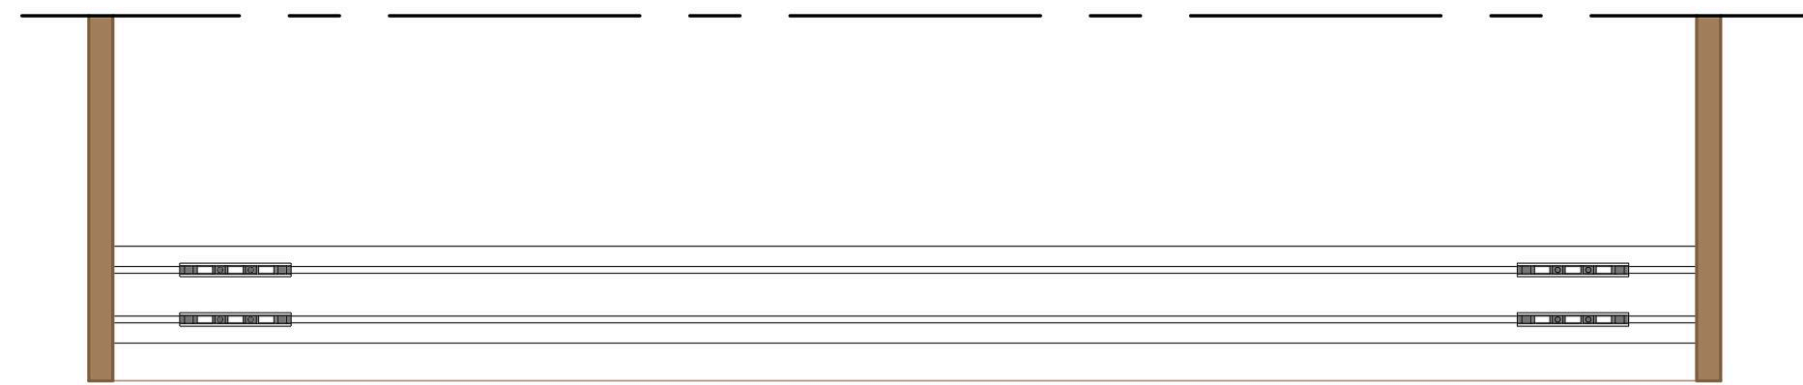

- **Plan View:** Shutters With Dimensions

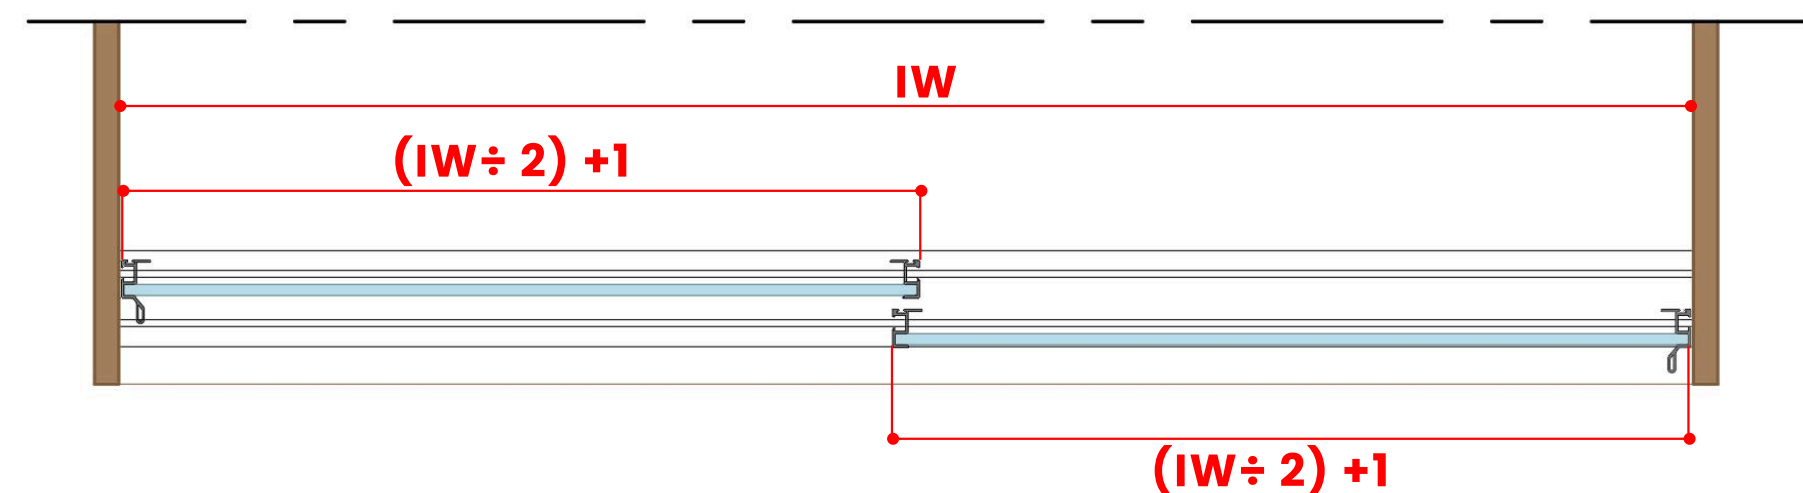

Note: IW =Inside Width

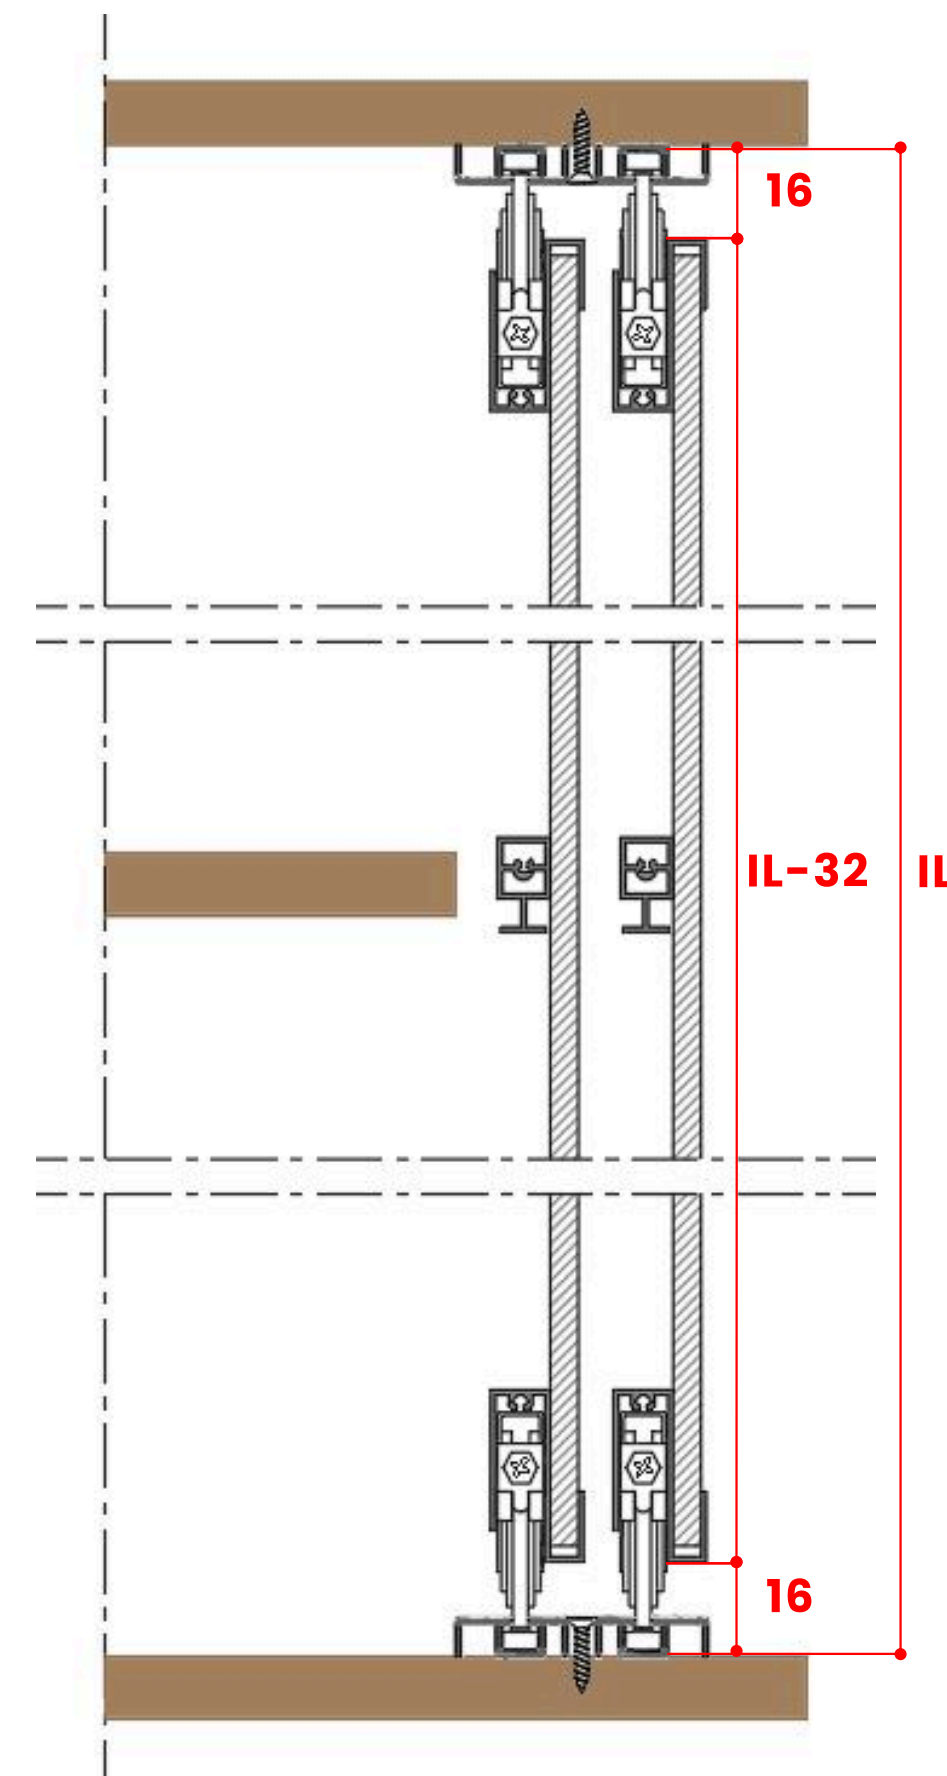

- **Section View:** Vertical Alignment And Shutter Dimensions


Note: IL =Inside Length

SLIDING DOOR OPTIONS


3 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters

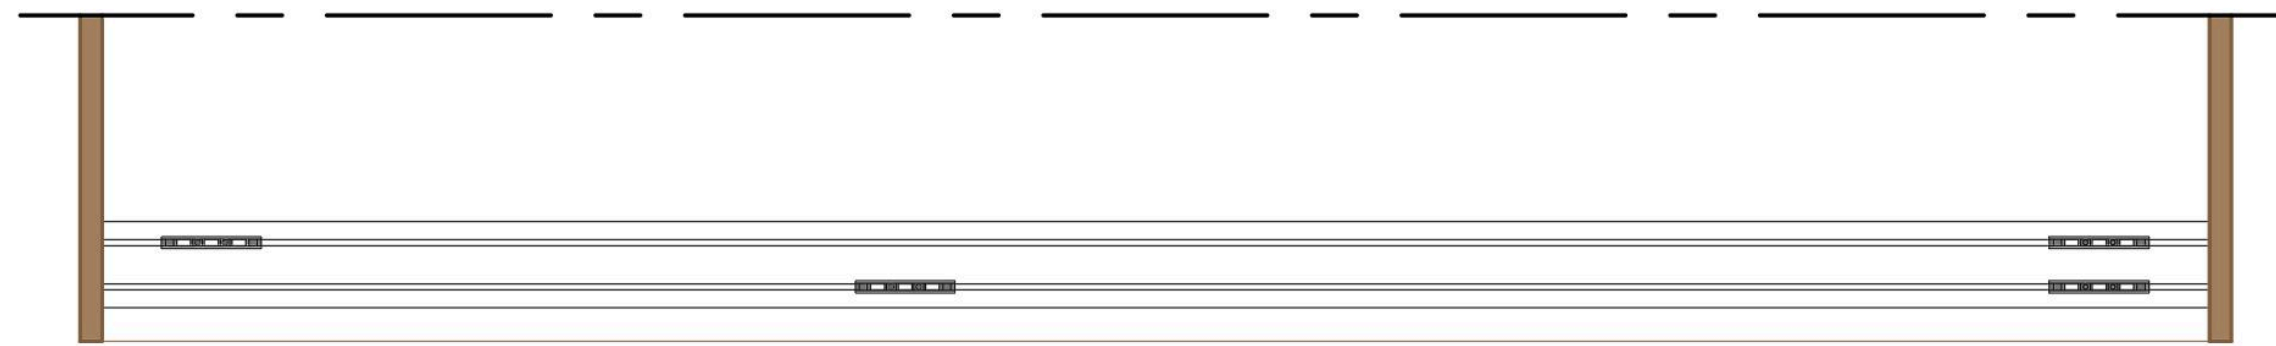

- **Plan View:** Shutters With Dimensions

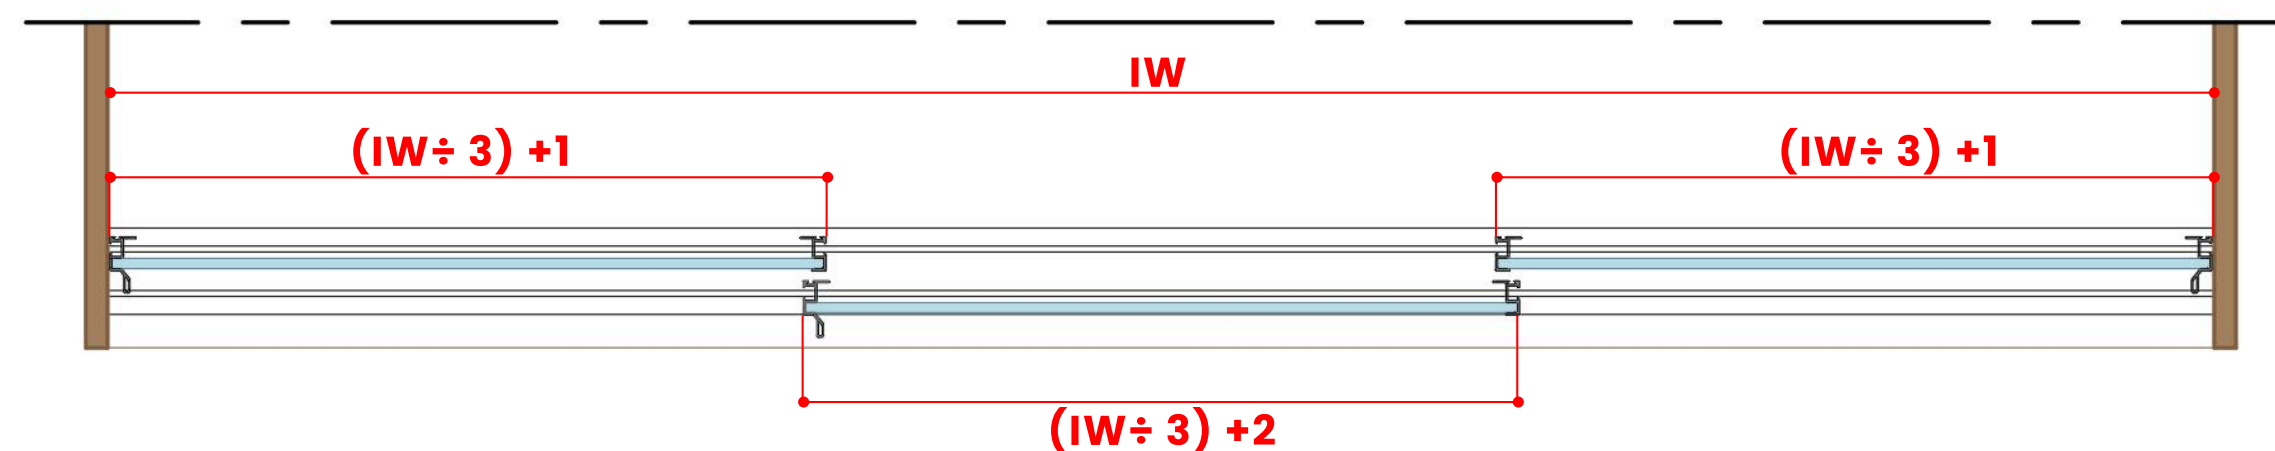

Note: IW =Inside Width

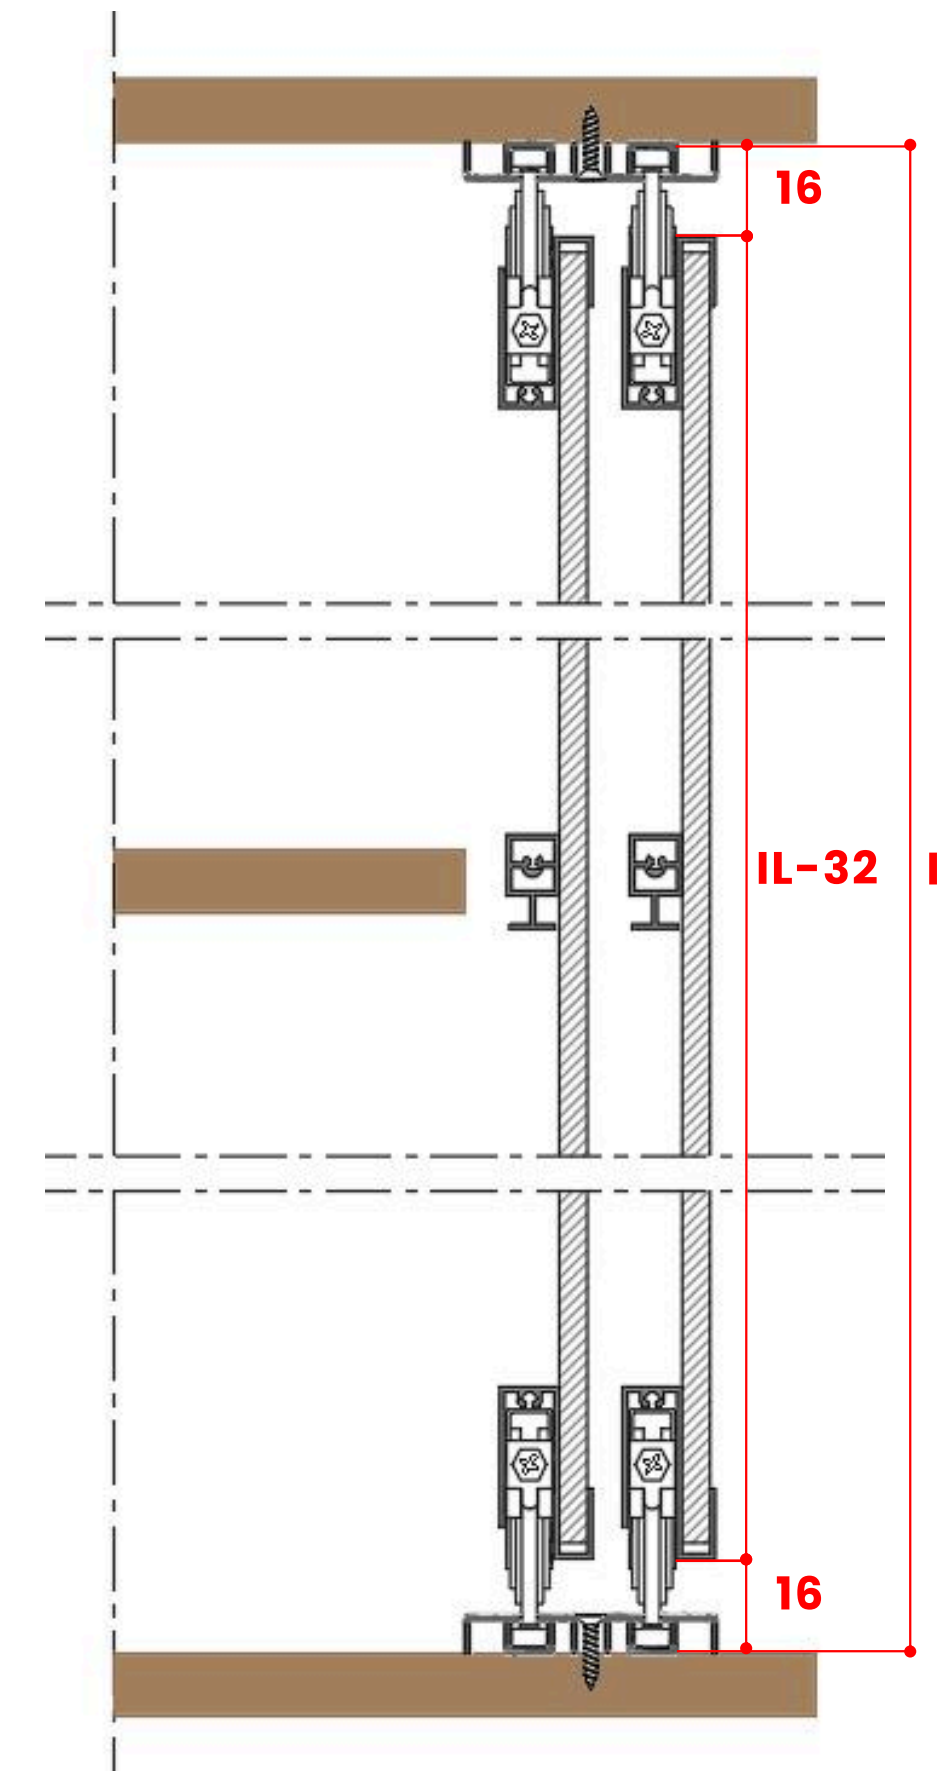

- **Section View:** Vertical Alignment And Shutter Dimensions


Note: IL =Inside Length

SLIDING DOOR OPTIONS


4 Door Configuration

The drawings define the required **shutter dimensions**, the **overlap between doors**, and the **rail positioning** in relation to the closet structure.


- **Plan View:** Upper Rail With Adapters

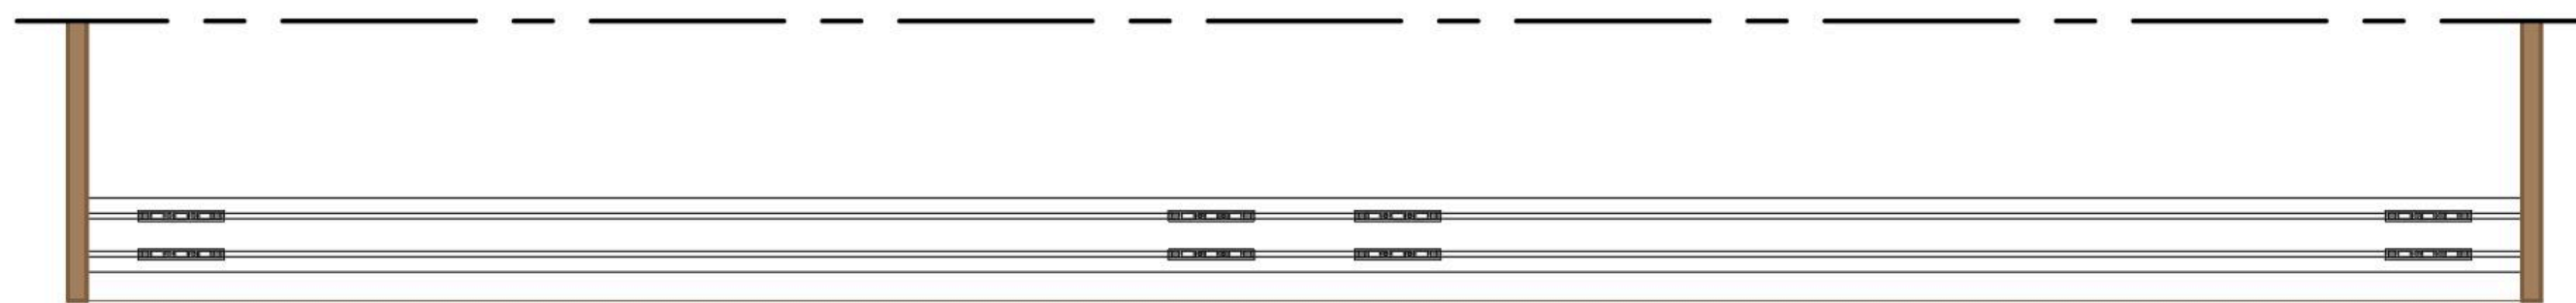

- **Plan View:** Shutters With Dimensions

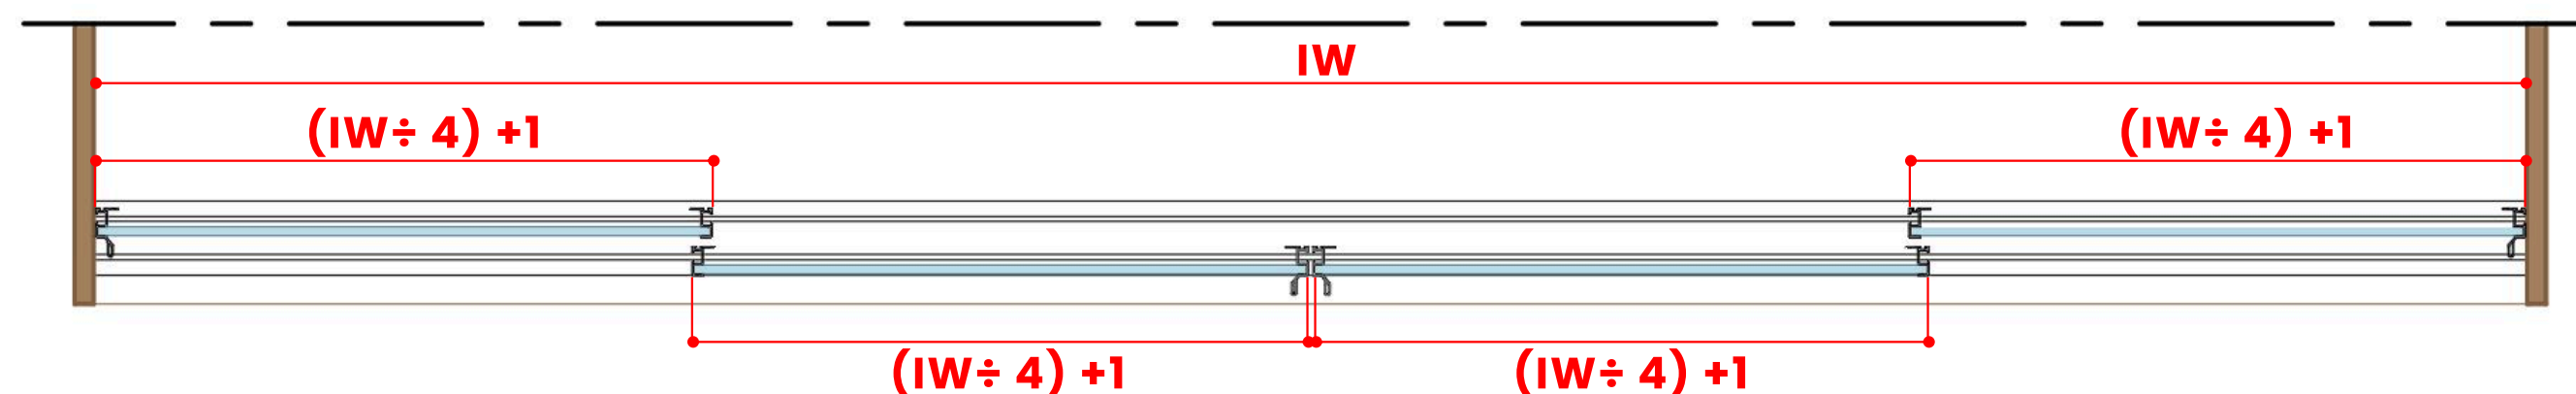

Note: IW =Inside Width

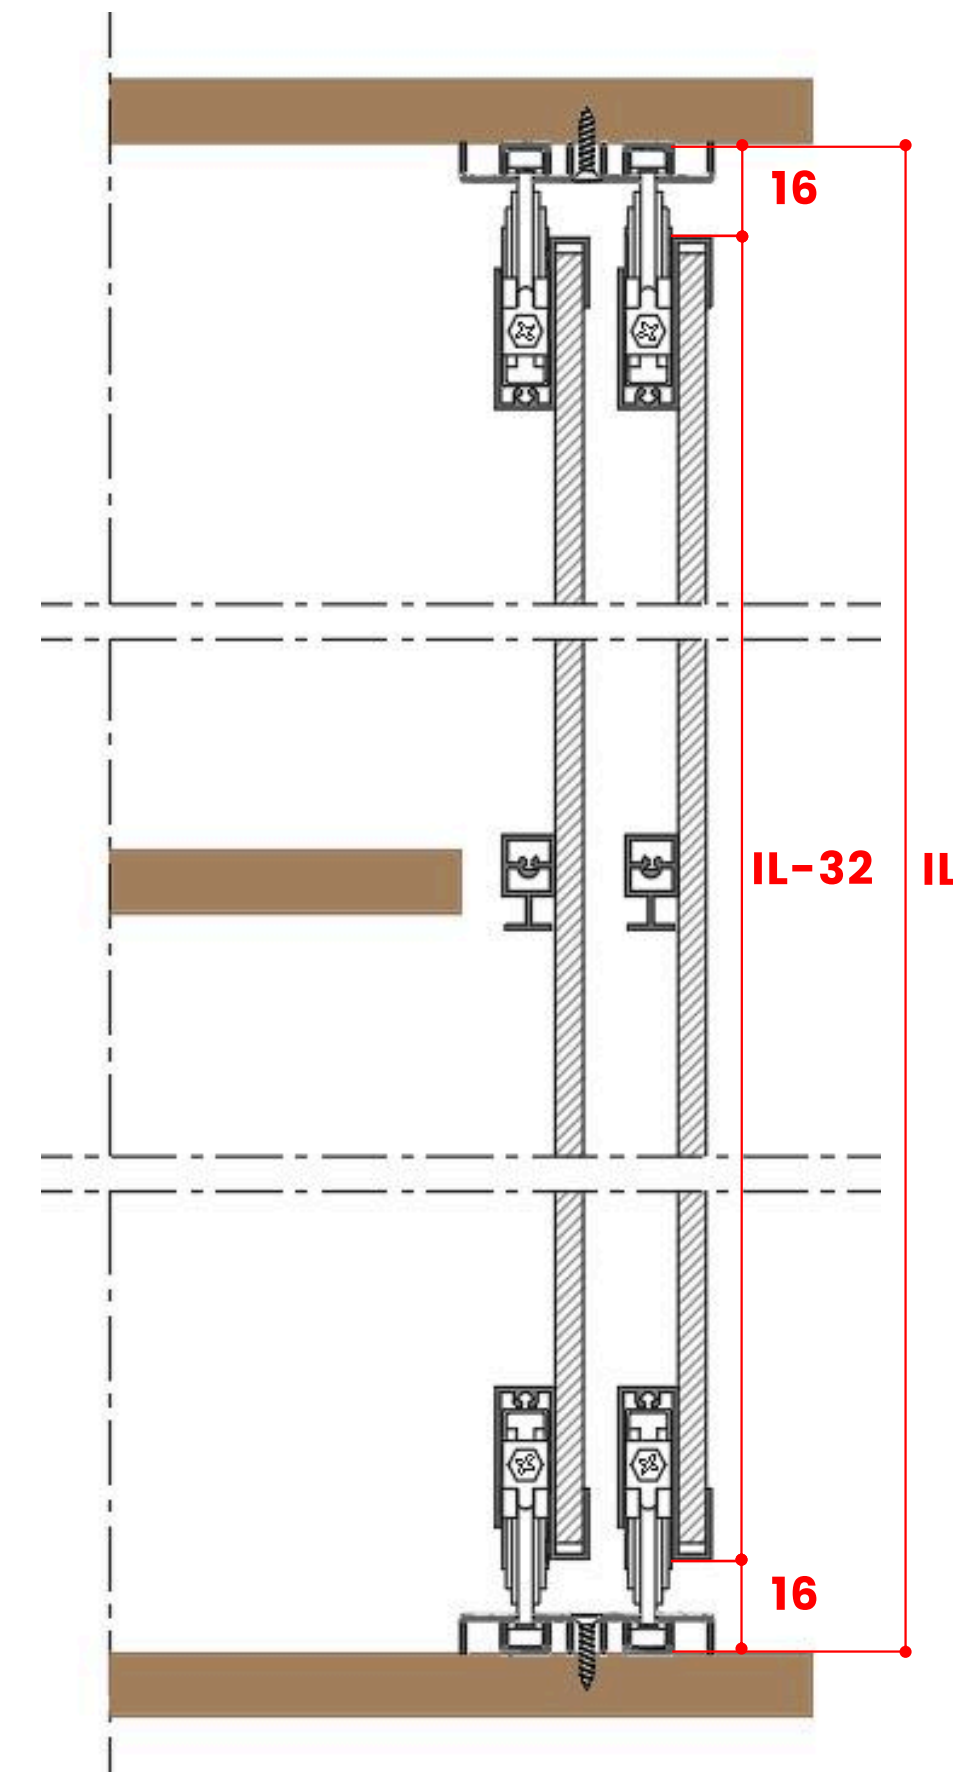


- **Section View:** Vertical Alignment And Shutter Dimensions


Note: IL =Inside Length

SHUTTER DETAILS


- The groove shown in the drawing is **8 mm wide**. It can hold **wood or glass panels** from **4 mm to 8 mm thick**.
- **4 mm Glass** is installed using our special rubber.

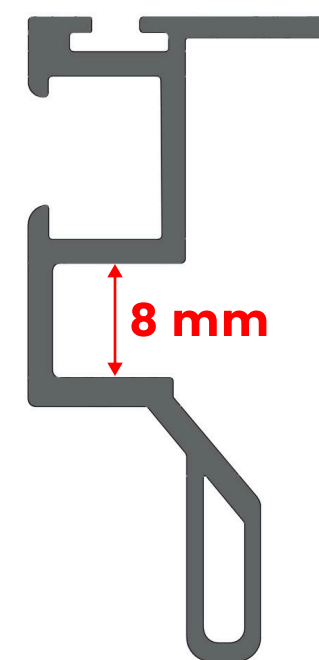

- Shutter frame with integrated handle

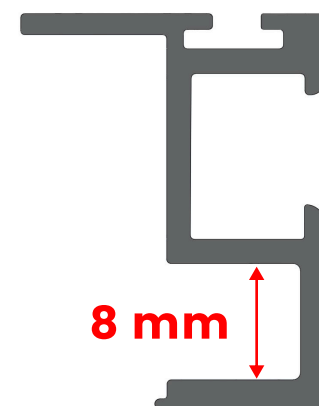

- Shutter frame without handle

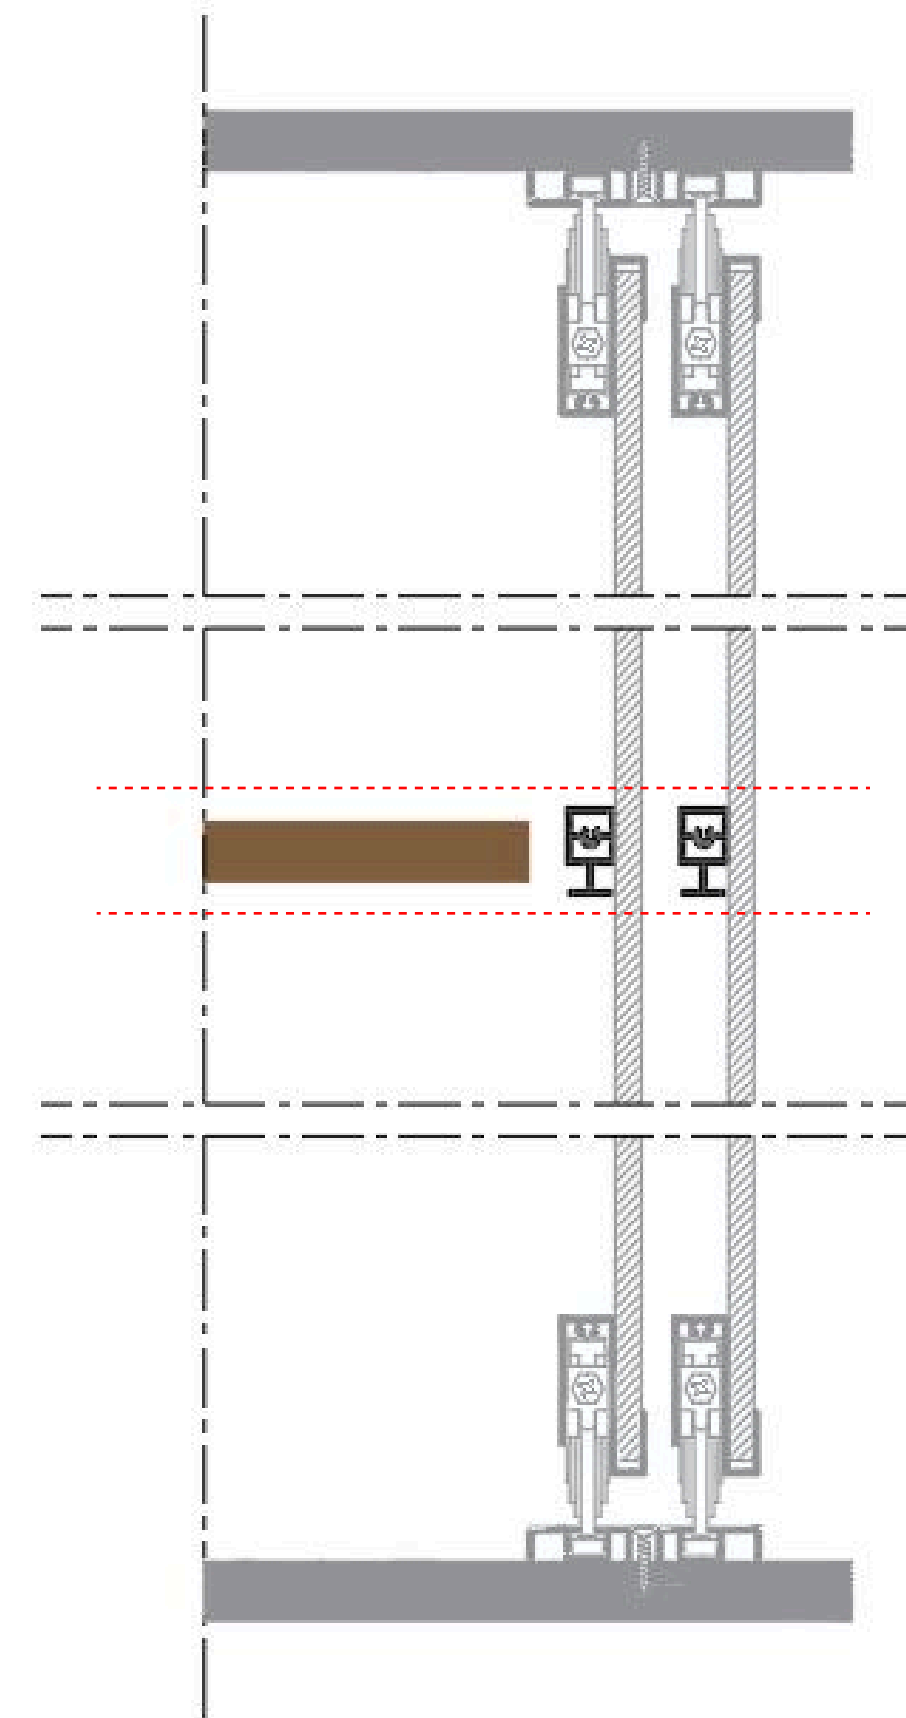




Section View – Closet Installation

- **Support profile** fixed to the glass shutter. **Shelves can be placed optionally**, but **symmetry is recommended** for strength and balance.

GLASS | WOOD CONFIGURATION

Wooden Back Shutter

For configurations with a **glass front shutter** and a **wooden back shutter**, a groove must be provided in the wooden shutter to ensure proper installation .

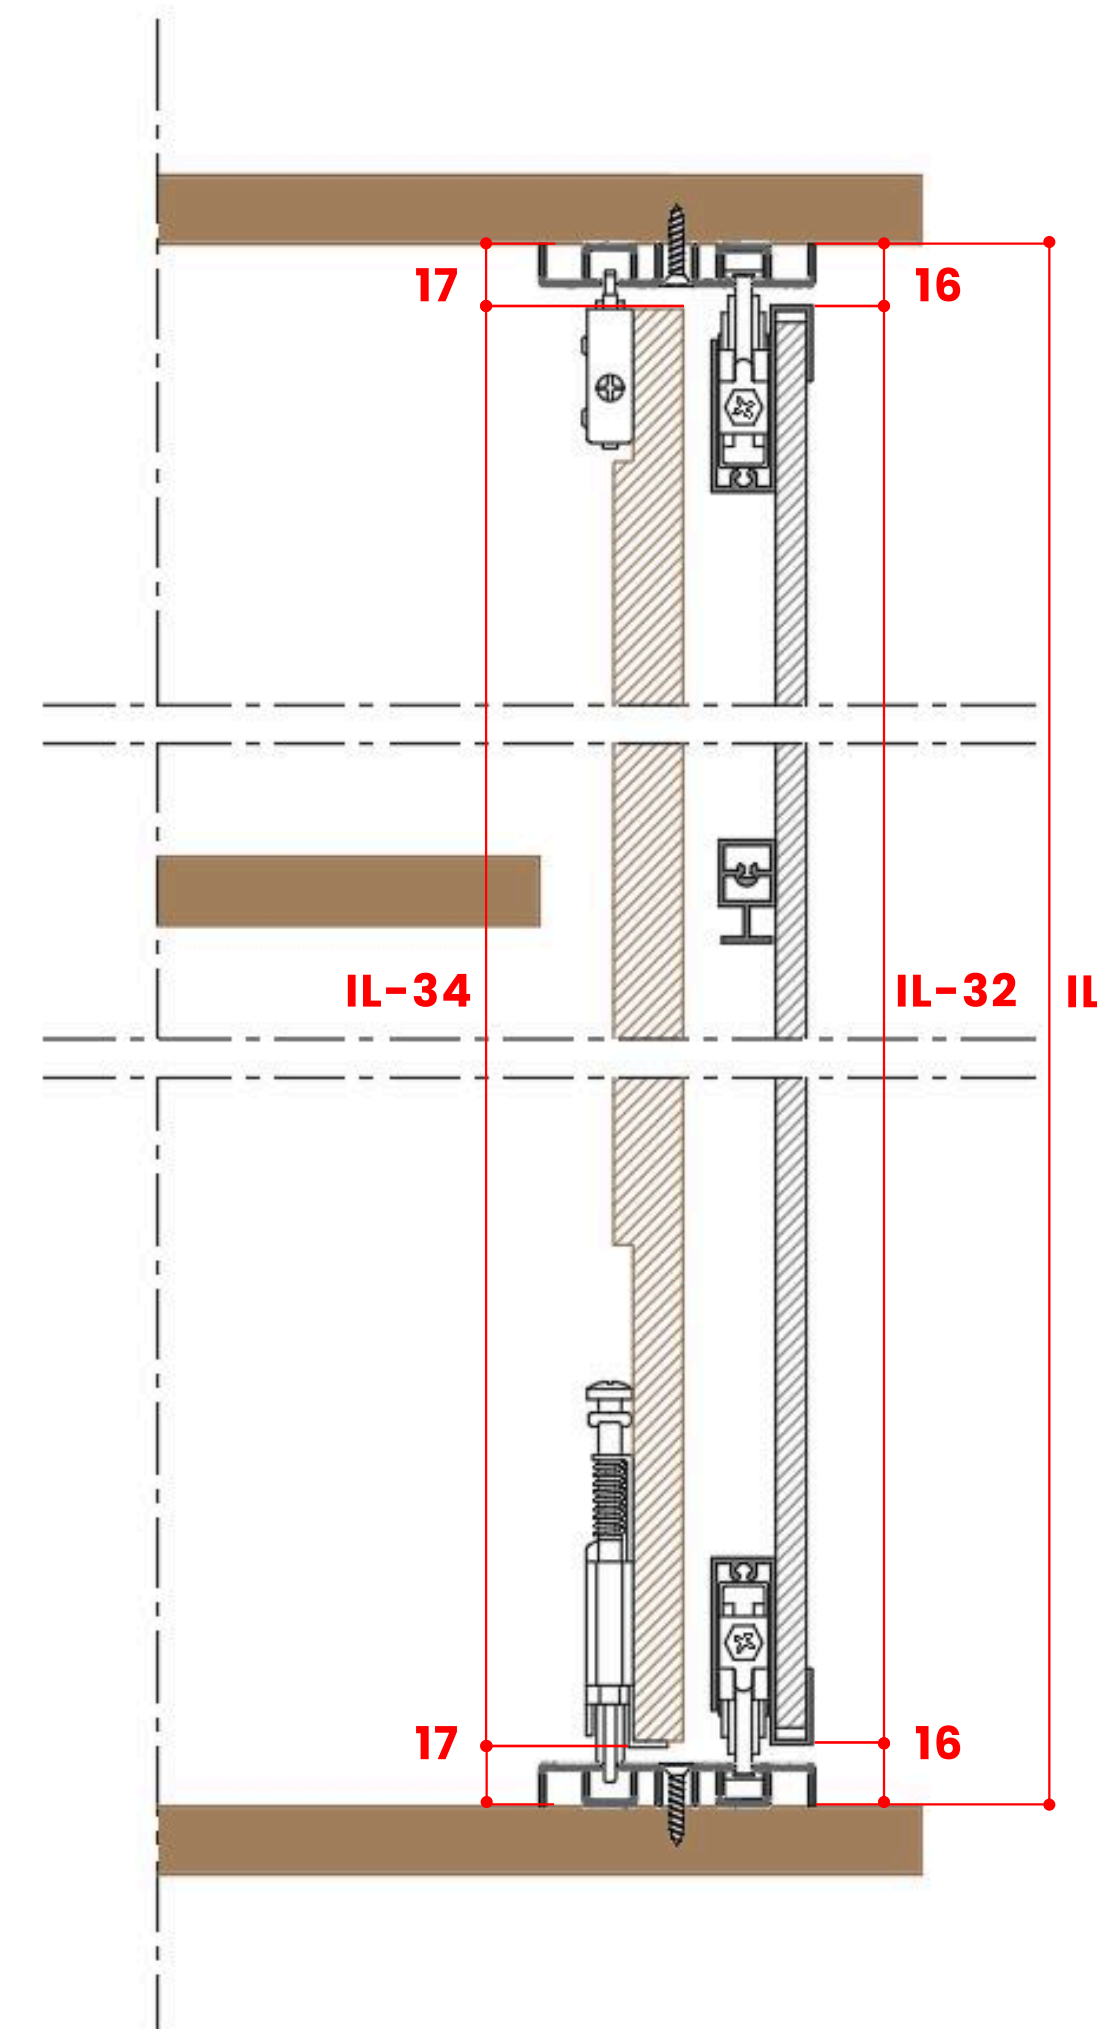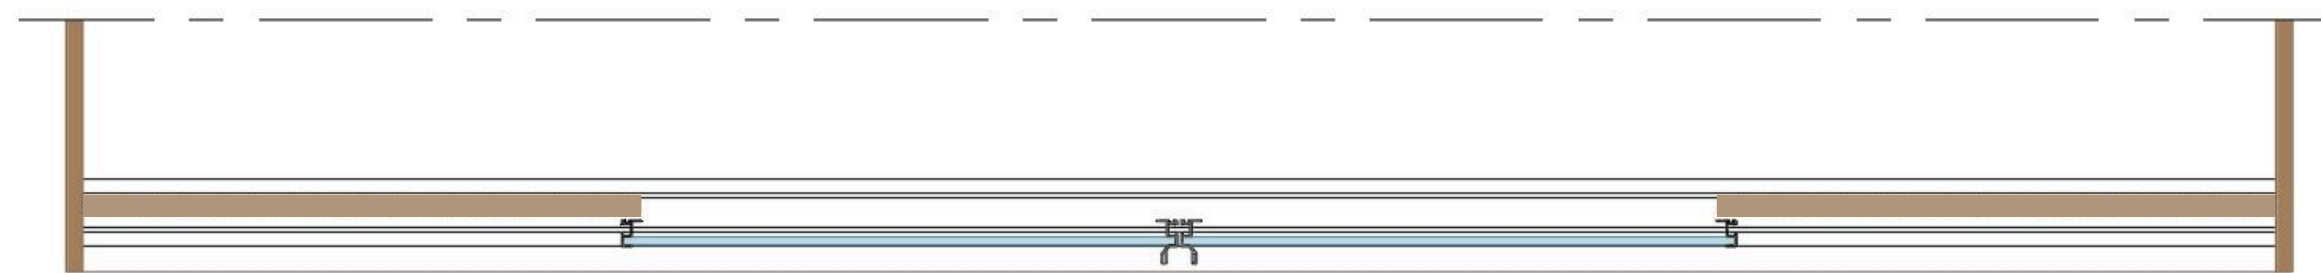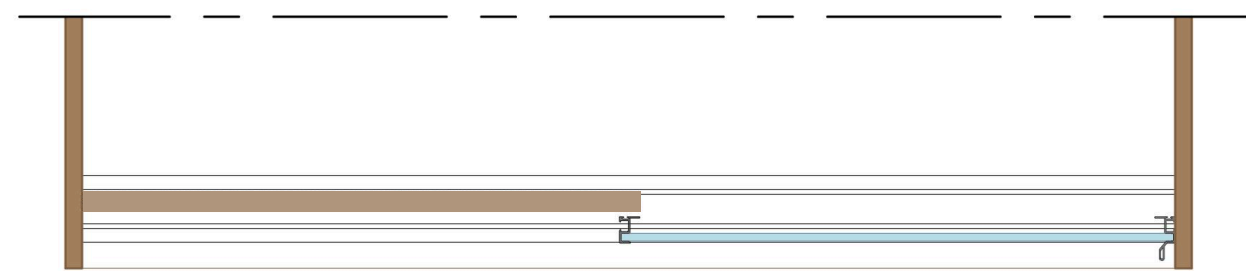

- **Section View:** Vertical Alignment And Shutter Dimensions


Note: IL=Inside Length

GLASS | WOOD CONFIGURATION



Groove Requirement

The following details show the **required groove dimensions** for the wooden back shutter, ensuring correct fitting and smooth system operation.

• Detail 1

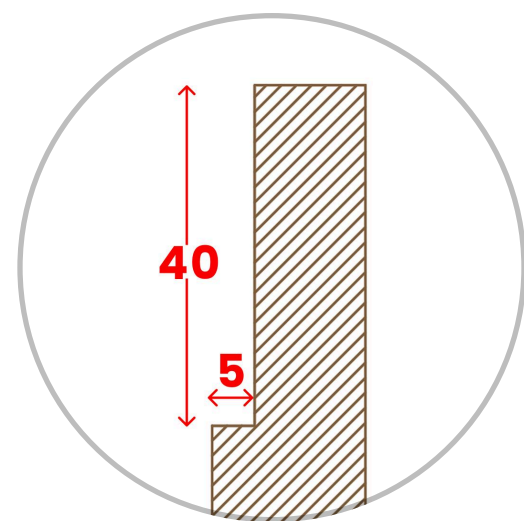


• Detail 2

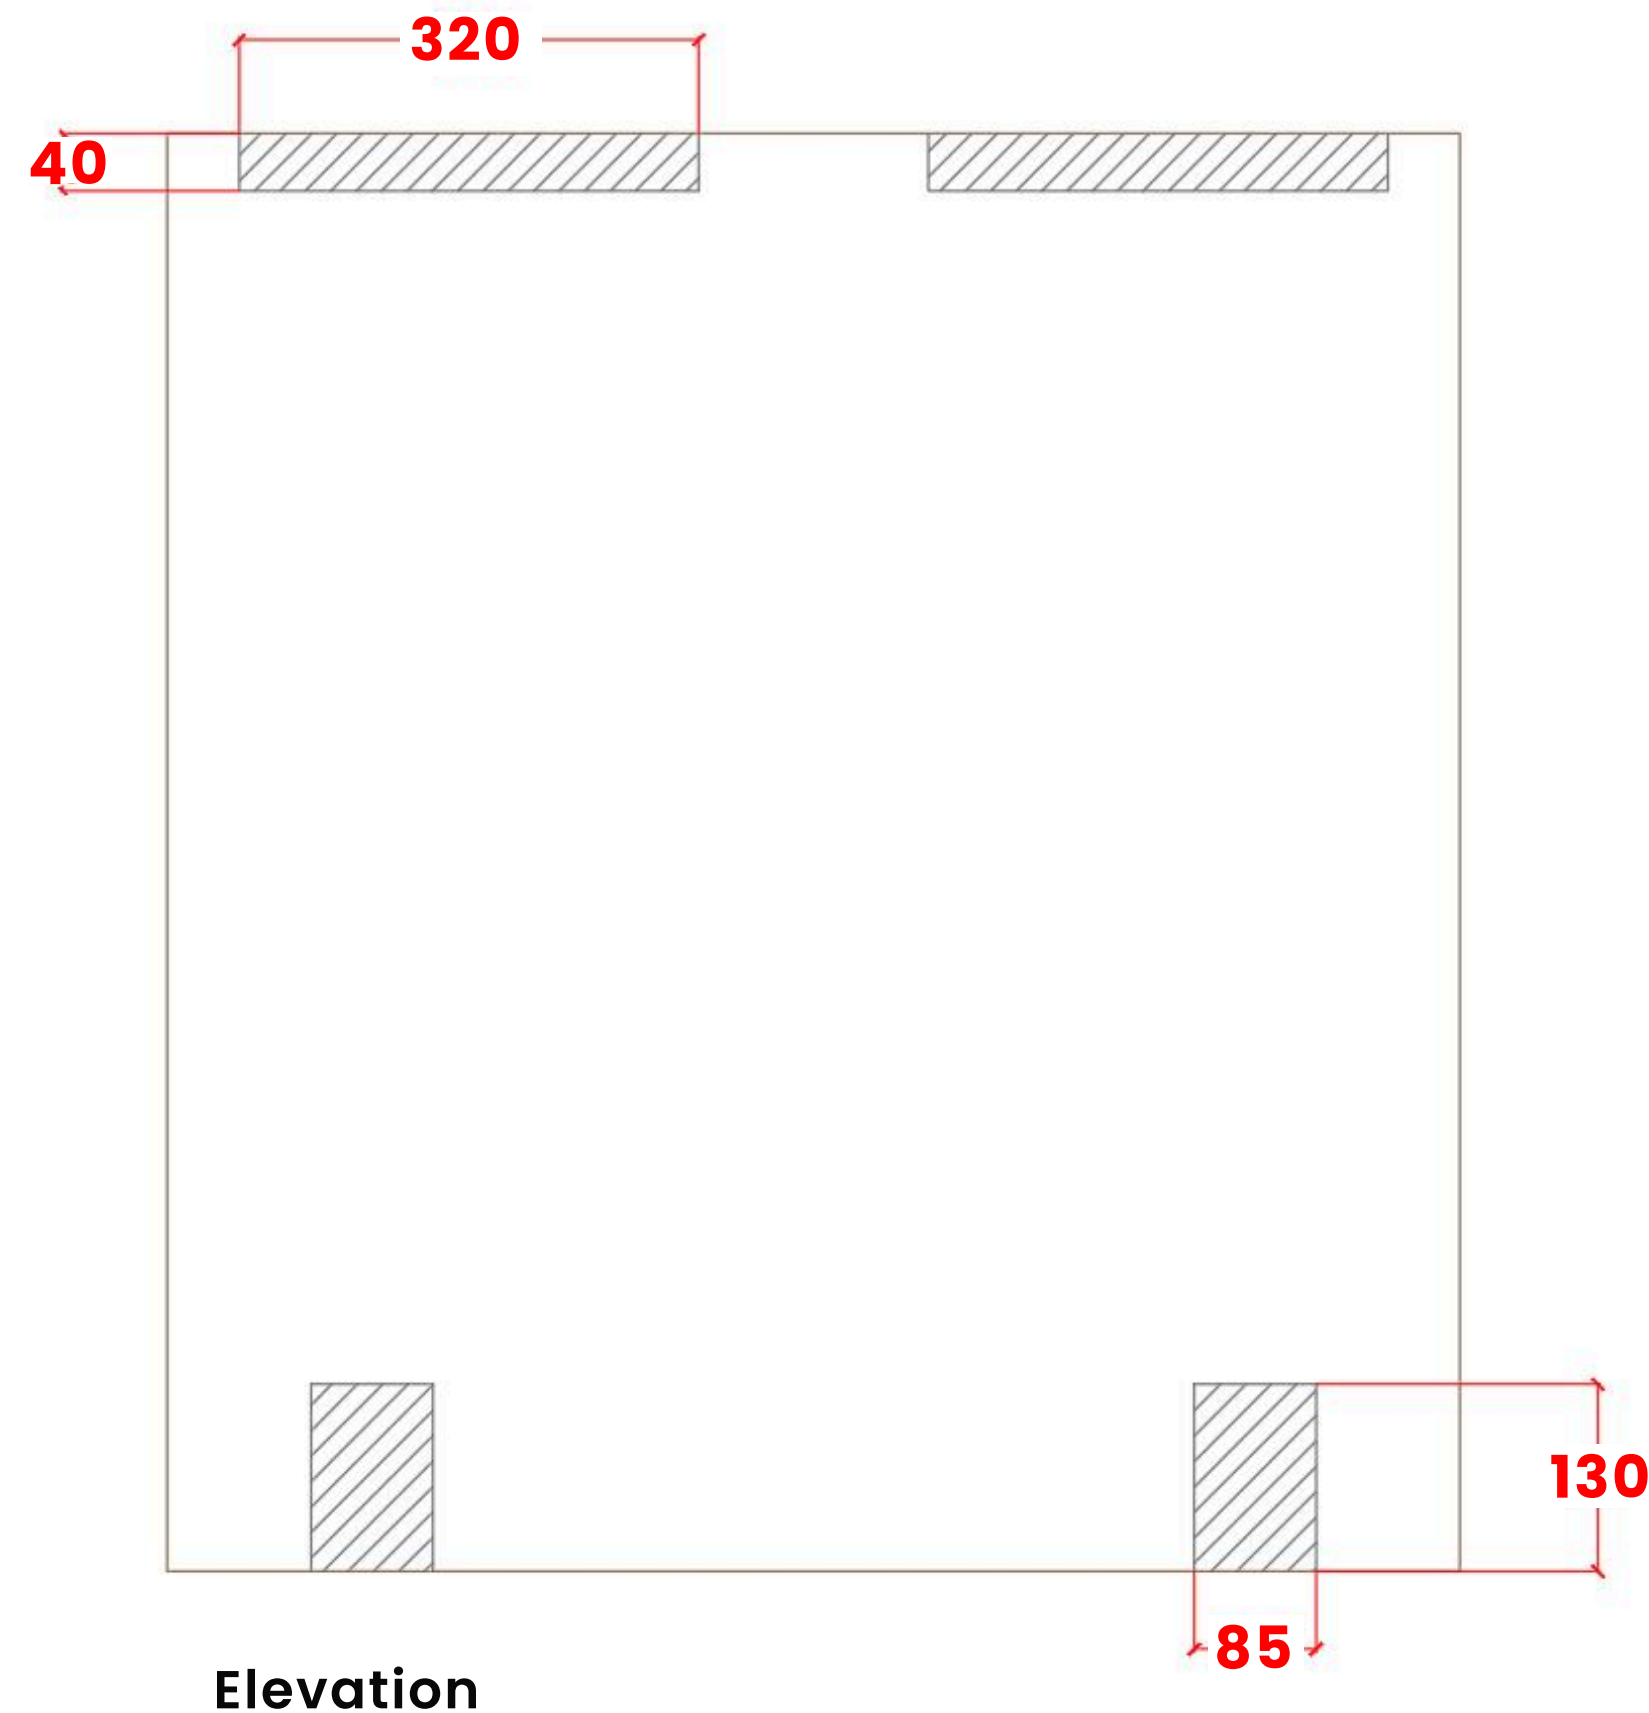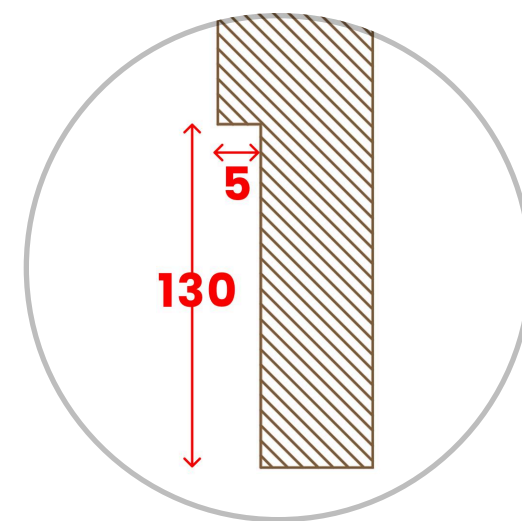


Elevation

Detail 1

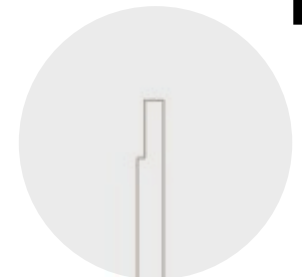


Detail 2

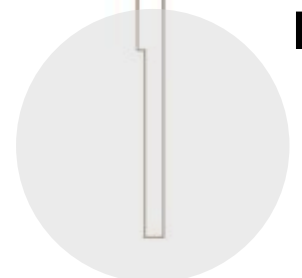


Section



SOFT-CLOSE SYSTEM

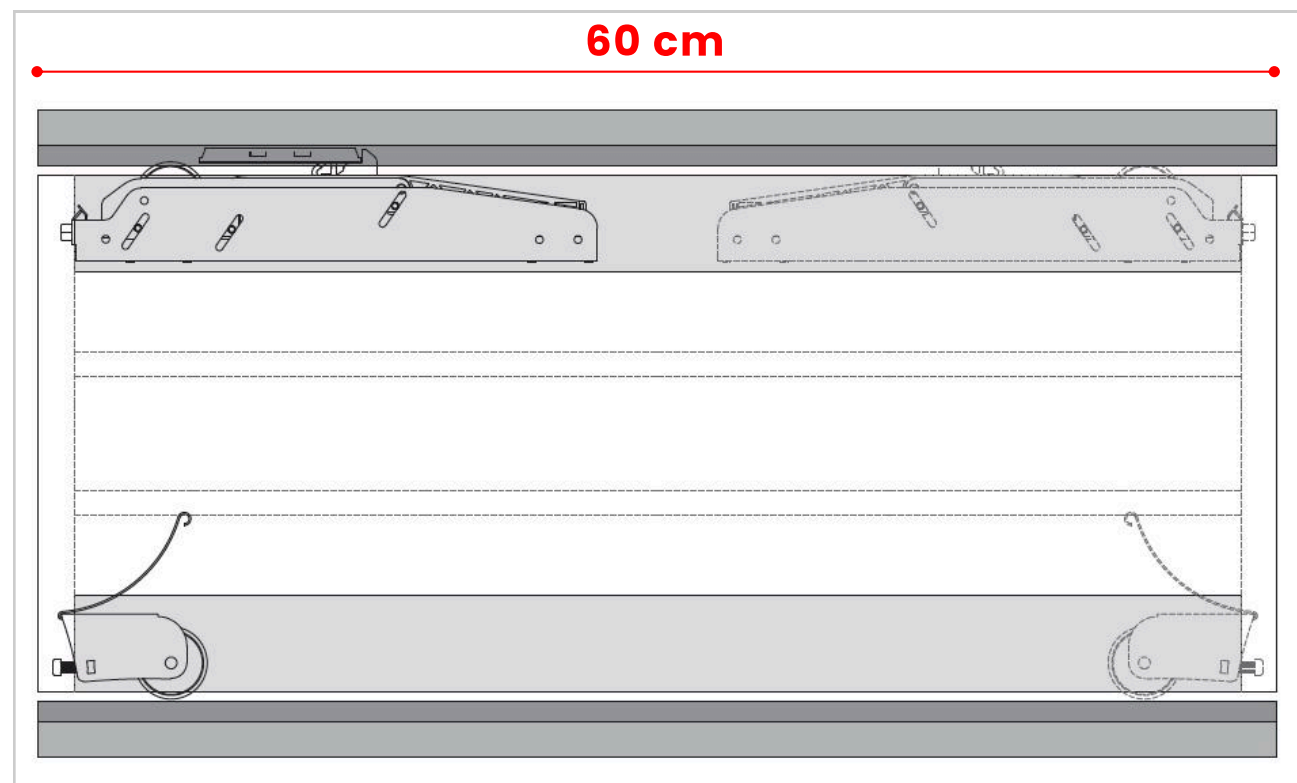


- For shutters with a **double soft-close** system, the **minimum width of the shutter required is 60 cm.**

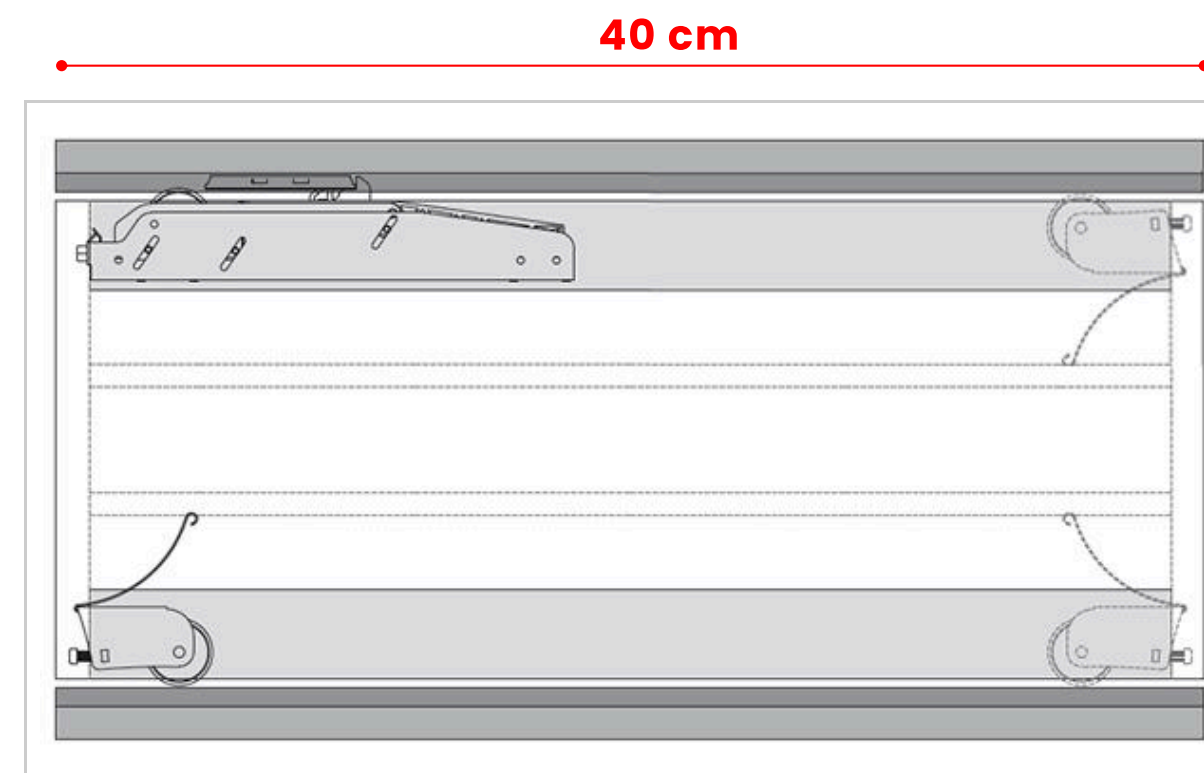


- In a **3-door setup**, the **two back shutters** are fitted with **single soft-close**, positioned on the handle side, with a minimum required width of 40 cm.


SOFT-CLOSE SYSTEM

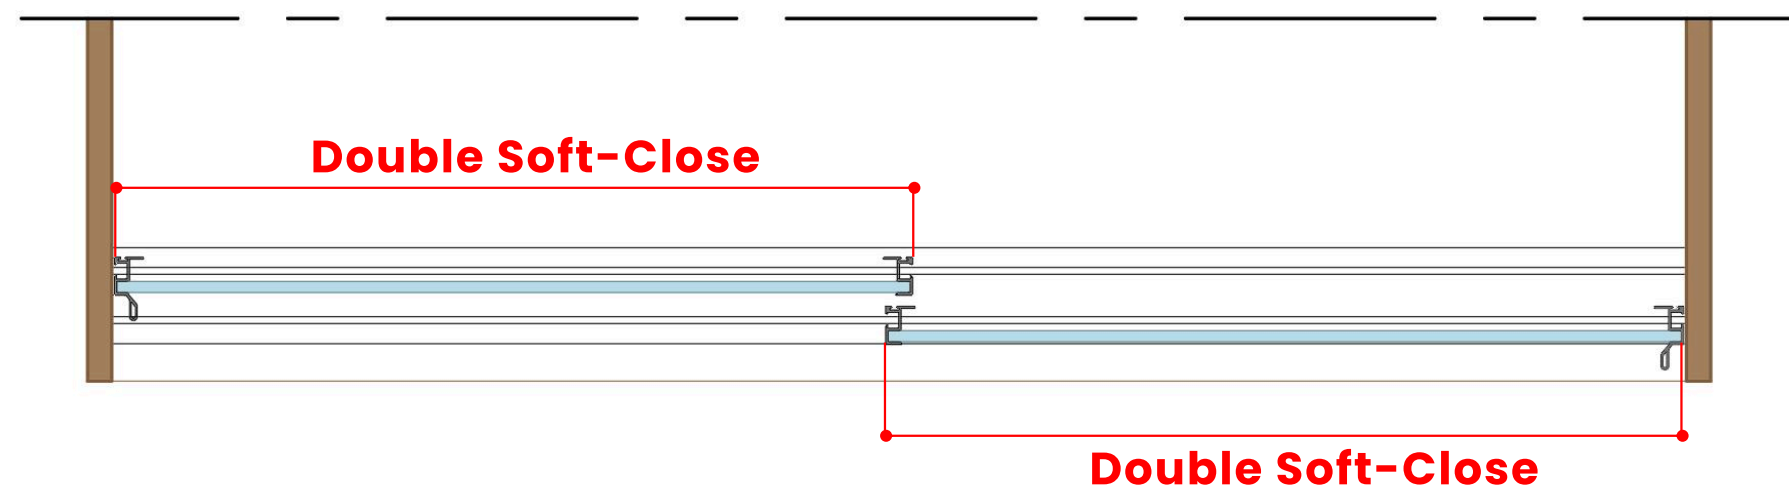

- Sliding Door Option - 2 Doors

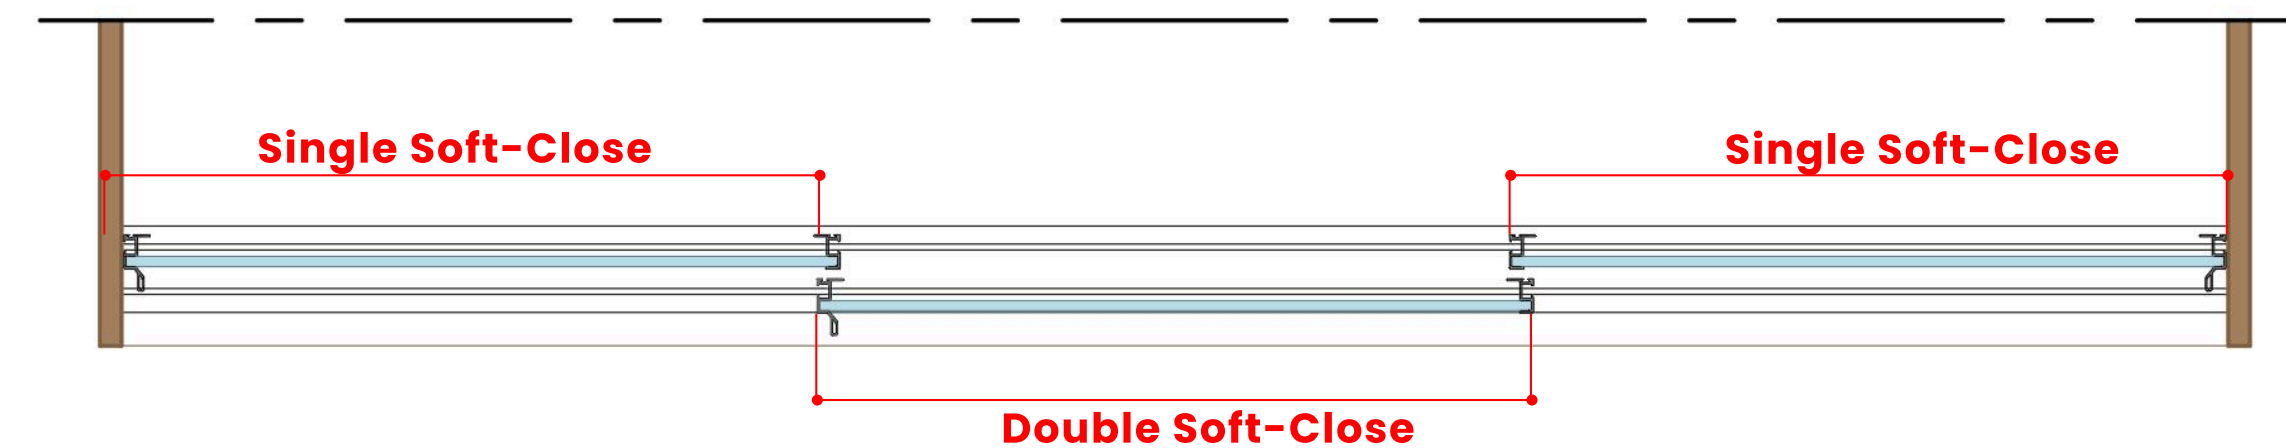


- Sliding Door Option - 3 Doors

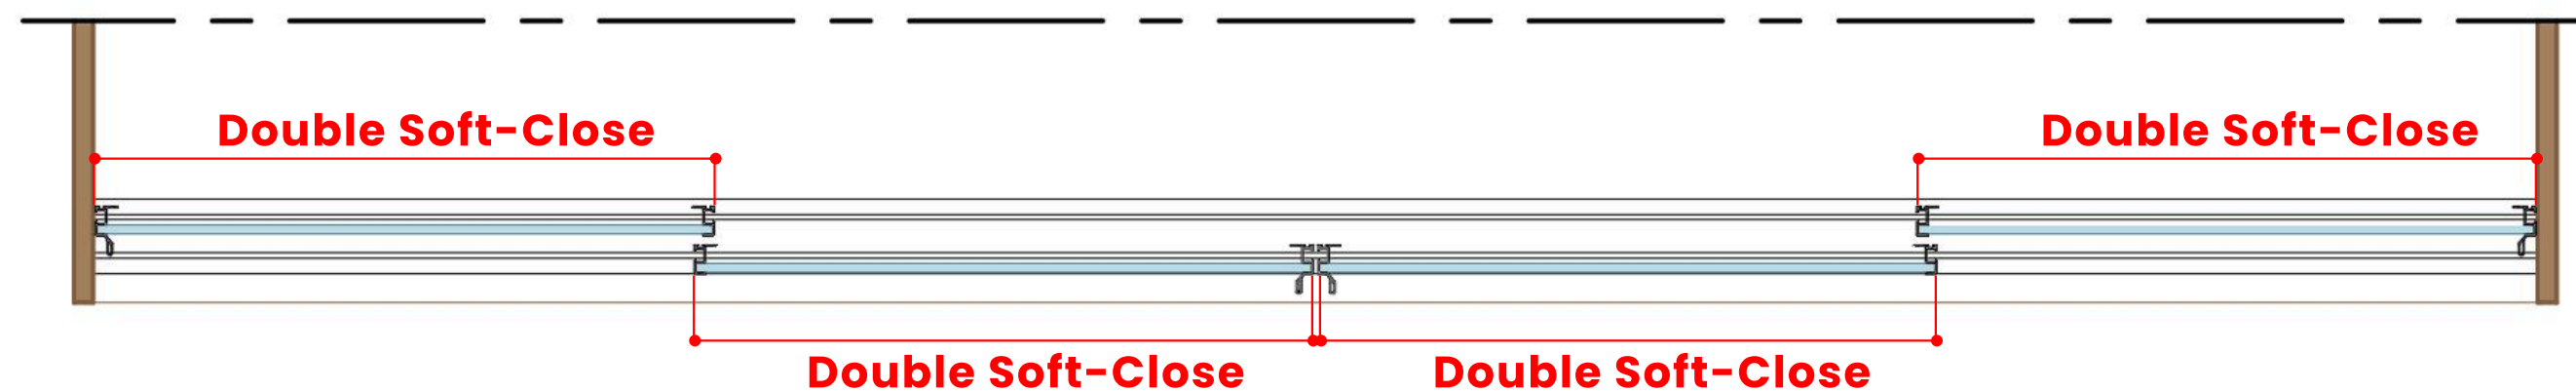


- Sliding Door Option - 4 Doors


CORNER DETAILS

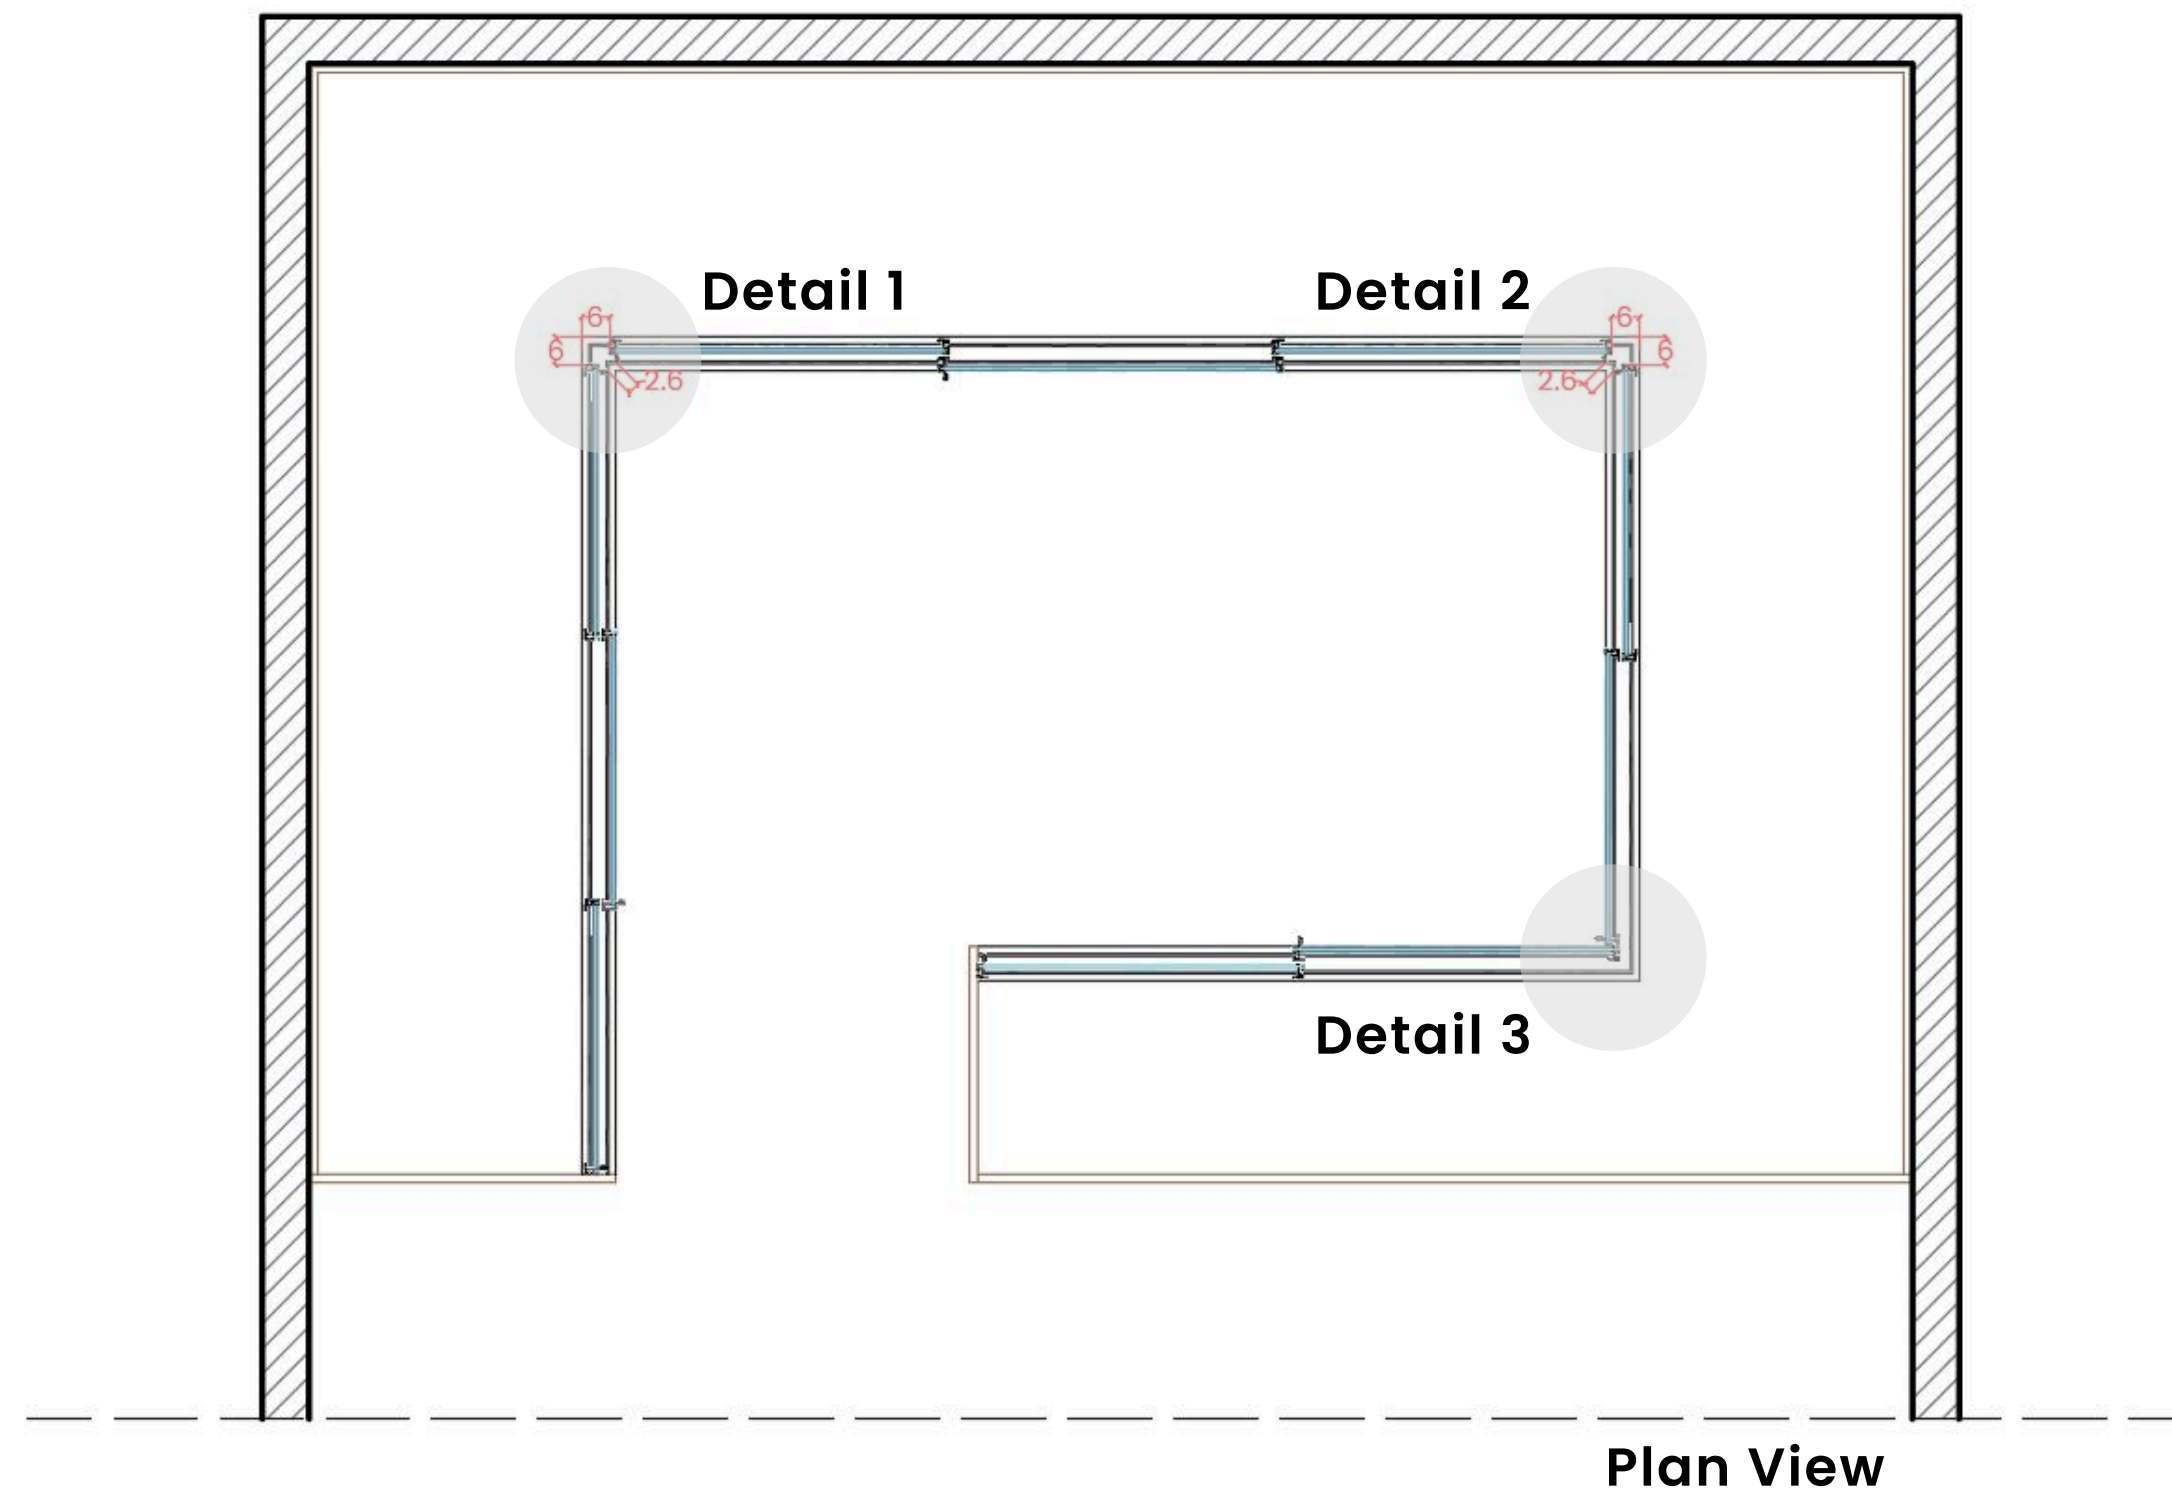


- Plan view and detailed drawings illustrating the corner configuration and shutter arrangement.

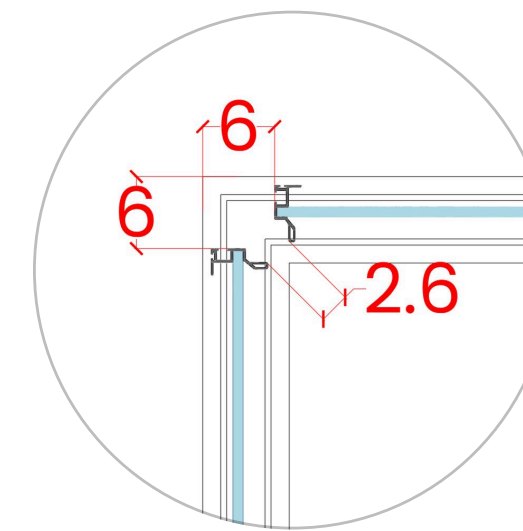

Detail 1

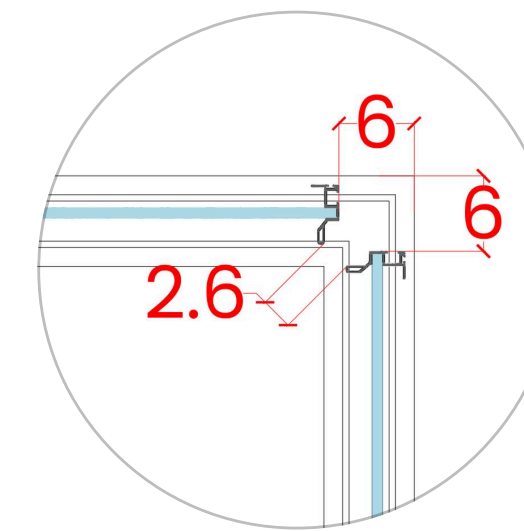




Detail 2

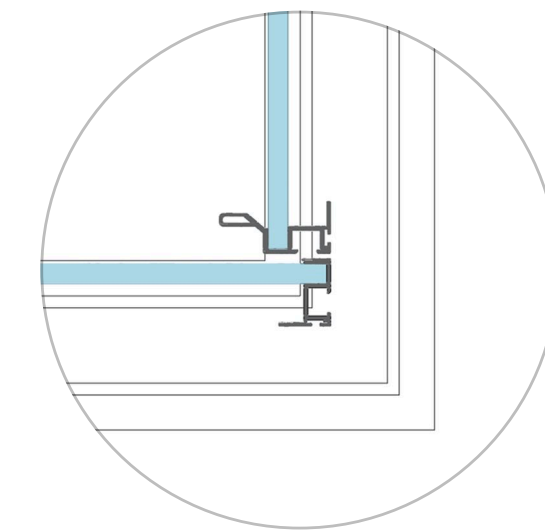

Detail 3

GLASS AND COLOR OPTIONS

- Color Options

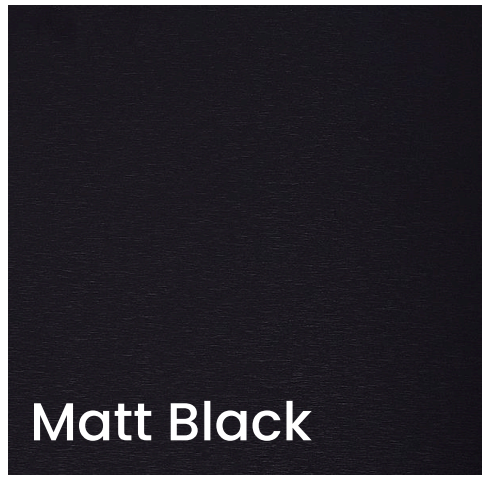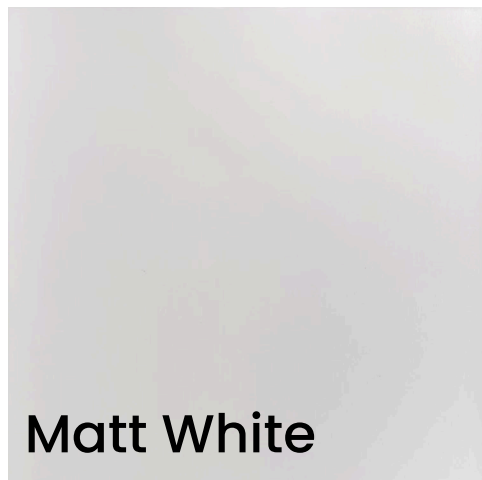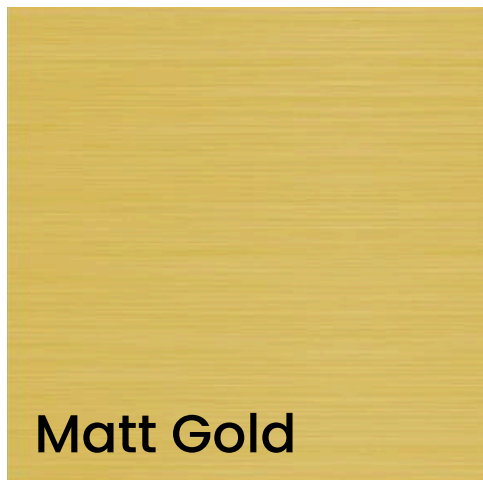

- Glass Options

Fumé	Bronze	Clear	Frosted Ribbed
White Mirror	Bronze Mirror	Black Mirror	
Ribbed	Back Painted Black	Back Painted White	
Reflective Bronze	Reflective Black	Frosted	



NATHALIUM
Elevating Spaces with Italian Precision



Closets

Nathalium .Co

Jamal Abdul Nasser Str. – Al Bahsas – Tripoli, Lebanon

Tel: 06/411790 , 06/411 791 – cell: 71/847529

www.nathalium.com – info@nathalium.com

